

Račna pneumatska 3/8"

1532



Profili



3/8"



Atributi proizvoda

- slobodna brzina 200 obrtaja/minutu
- max. okretni moment 27 Nm
- preporučeni pritisak vazduha: 6, 2 bara
- potrošnja vazduha 113 l / min
- priključak za zrak: 1/4"
- Za vijke do dimenzije M8


Prednosti:

- uska glava
- kuglični ležaj
- gumirana ručka
- novi sistem regulacije zraka
- 360 ° dovod vazduha za okretanje
- zadnji izduvni sistem
- niski šum 79dB (A)
- mali i kompaktan alat
- kvalitetna proizvodnja

- praktičan prekidač za uključivanje
- brzo i praktično podešavanje smijera rotacije

Upotreba:

- automobilска индустрија
- авионарска индустрија
- пољопривредна мешовитост
- тешка индустрија
- већи грађевински струјни прибори
- бродоградња
- индивидуална монтажа
- Важно!
- препоручује се коришћење Uniorovih IMPACT насадних кључева

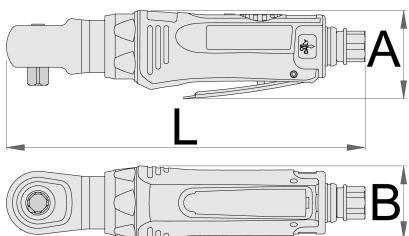

		L	A	B		
627566	3/8"	196	49	40,8	54	748

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

Photo (pictures)



Accessories



Spojnice muške



Spojnice muške



Spojnica ženska



Pripremna grupa 3/8"



Pripremna grupa 1/2"



Crijevo spiralno za zrak

Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.



- Always disconnect tools not in use from the air supply.