

Tower pincers

531/4



Profiles



Standards

DIN ISO 9242

Product features


- material: premium plus carbon steel
- drop forged, entirely hardened and tempered
- the cutting edges are induction-hardened to 61HRc
- head surface finish: finely ground
- surface finish: phosphated to standard ISO 9717
- made according to standard ISO 9242




Advantages:

- the precise form of the joint enables the automatic opening of the pincers in a horizontal position, so the force is applied only during cutting of the wires

Usage:

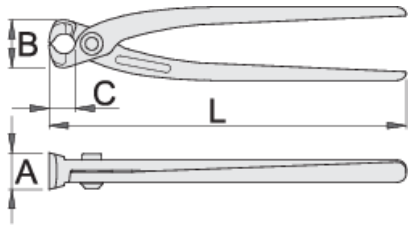


- useful for the binding and cutting of wires



|  | L | B | A | C |  |  |
|--|-----|----|----|----|--|---|
| 601372 | 190 | 26 | 22 | 15 | Till end of stock | 214 |
| 601373 | 224 | 30 | 23 | 17 | | 333 |
| 601374 | 250 | 36 | 25 | 18 | | 424 |
| 601375 | 280 | 36 | 25 | 18 | | 455 |

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

Related products

-  Tower pincers
-  Tower pincers
-  Heavy duty tower pincers