

Tower pincers

531/4



Profielen



Product attributen

- material: premium plus carbon steel
- drop forged, entirely hardened and tempered
- the cutting edges are induction-hardened to 61HRc
- head surface finish: finely ground
- surface finish: phosphated to standard ISO 9717
- made according to standard ISO 9242

Voordelen:


- the precise form of the joint enables the automatic opening of the pincers in a horizontal position, so the force is applied only during cutting of the wires

Gebruik:


- useful for the binding and cutting of wires

Standaard

DIN ISO 9242

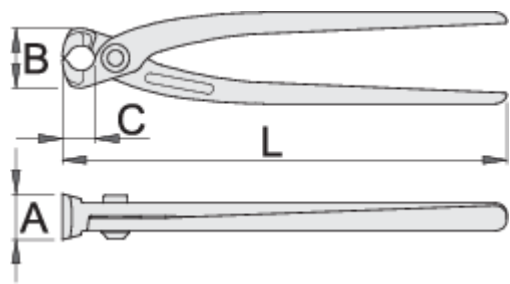


Barcode	L	B	A	C	Icon
601372	190	26	22	15	214
601373	224	30	23	17	333
601374	250	36	25	18	424
601375	280	36	25	18	455

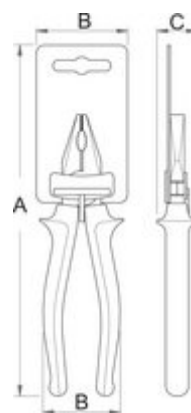

Retail verpakking

Barcode	MA	MB	MC	Icon
601372	270	58	25	200
601373	295	72	27	336
601374	320	72	27	407
601375	350	72	27	443

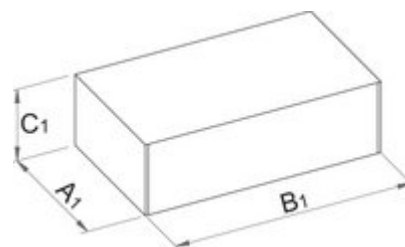

Transport verpakking

Barcode	Hand icon	TA	TB	TC	Icon
601372	4	75	308	60	870
601373	4	90	330	84	1481
601374	4	85	377	73	1845
601375	4	85	377	73	1969