

Moniertang

531/4



Profielen



Standaard

DIN ISO 9242

Product attributen

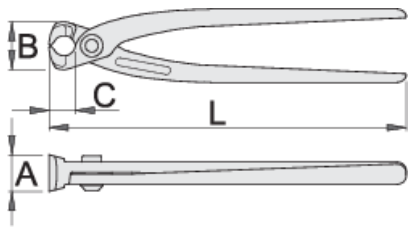
- materiaal: premium plus carbonstaal
- drop forged, entirely hardened and tempered
- the cutting edges are induction-hardened to 61HRc
- head surface finish: finely ground
- surface finish: phosphated to standard ISO 9717
- made according to standard ISO 9242



Voordelen:

- the precise form of the joint enables the automatic opening of the pincers in a horizontal position, so the force is applied only during cutting of the wires

Gebruik:


- useful for the binding and cutting of wires



	L	B	A	C	
601372	190	26	22	15	214
601373	224	30	23	17	333
601374	250	36	25	18	424
601375	280	36	25	18	455

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Gerelateerde producten

 Moniertang

 Moniertang

 Moniertang zwaar