Pro Truing stand 2.1

1689 2.1	ΝΈΟ



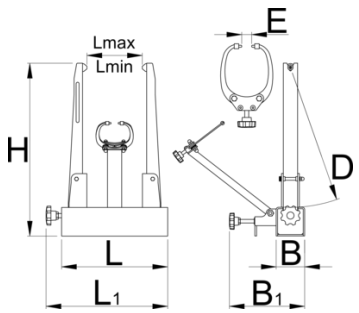
Χαρακτηριστικά προϊόντος

- Η γεωμετρία των ακίδων επιτρέπει ταυτόχρονο έλεγχο του άξονα για ακριβή ρύθμιση του τροχού
- The upright arms position can be adjusted with an upright adjustment knob to fit the axle width.
- The caliper arm position can be adjusted to fit the wheel radius and the caliper tip distance can be adjusted to fit the rim width.
- Spring loaded caliper arm and the calipers can be quickly pulled away, automatically springing back to a set position when inserting a new wheel. This enables faster work of several same size wheels.
- Strong base for high precision Longer and redesigned upright arms for increased clearance and truing accuracy
- Wide calipers for greater wheel clearance

- Supports through axle hubs up to 197 mm width (with use of adapters). Max. arm opening 230 mm (without adapters)
- New bearings on the upright arm adjust axle are spring loaded for improved precision and reduced frequency of calibration
- Composite caliper tips prevent scratching the rim and are designed to make radial truing easier
- Precision threads and springs for smooth operation 8 mm bench mount holes at the bottom, 268 mm center to center
- Clean, all-black design
- Includes conical magnetic through axle adapters, one size fits all (12, 15 and 20). Adapters can be affixed anywhere on the base and secured to the upright arms with a bolt for a more permanent setup.
- Includes white high gloss stickers for the base and caliper arm, improving background contrast (stickers are not preapplied)

Συμβατότητα:

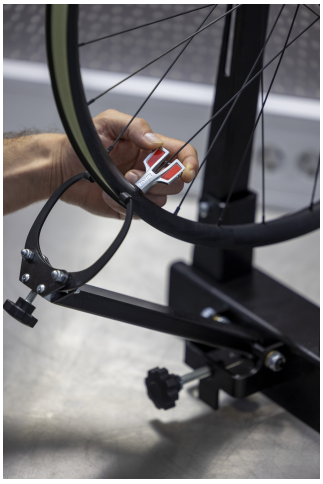
- Accepts wheels up to 32″ with tire installed
- Supports solid, quick release and through axle hubs
- Through axle hubs are supported with use of the adapters (included with truing stand)
- One pair of through axle adapters support all sizes of through axles






	D	E	L	L	H	L	L1	
640434	390	40	40	226	525	298	342	8550

* Οι εικόνες των προϊόντων είναι συμβολικές. Ολες οι διαστάσεις είναι σε mm,το βάρος είναι σε γραμμάρια. Όλες οι αναφερόμενες διαστάσεις μπορεί να διαφέρουν σε ανοχές.

Χρήση (εικόνες)

Σχετικά προϊόντα


Pro Truing stand upgrade set