Pro Truing stand 2.1

1689 2.1	NEW



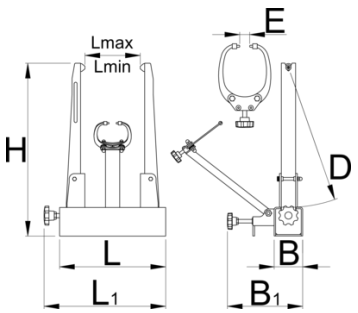
제품 특징

- 캘리퍼의 기하학적 구조는 림의 정확한 트루잉을 위한 동시 축 제어를 가능하게 합니다.
- The upright arms position can be adjusted with an upright adjustment knob to fit the axle width.
- The caliper arm position can be adjusted to fit the wheel radius and the caliper tip distance can be adjusted to fit the rim width.
- Spring loaded caliper arm and the calipers can be quickly pulled away, automatically springing back to a set position when inserting a new wheel. This enables faster work of several same size wheels.
- Strong base for high precision Longer and redesigned upright arms for increased clearance and truing accuracy
- Wide calipers for greater wheel clearance

- Supports through axle hubs up to 197 mm width (with use of adapters). Max. arm opening 230 mm (without adapters)
- New bearings on the upright arm adjust axle are spring loaded for improved precision and reduced frequency of calibration
- Composite caliper tips prevent scratching the rim and are designed to make radial truing easier
- Precision threads and springs for smooth operation 8 mm bench mount holes at the bottom, 268 mm center to center
- Clean, all-black design
- Includes conical magnetic through axle adapters, one size fits all (12, 15 and 20). Adapters can be affixed anywhere on the base and secured to the upright arms with a bolt for a more permanent setup.
- Includes white high gloss stickers for the base and caliper arm, improving background contrast (stickers are not preapplied)

Compatibility:


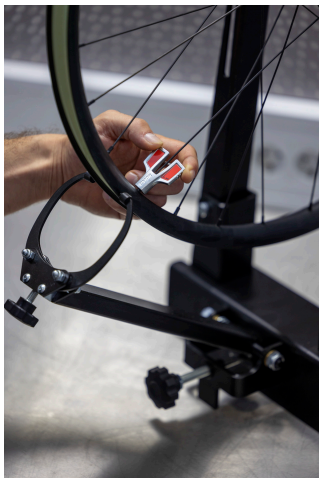
- Accepts wheels up to 32″ with tire installed
- Supports solid, quick release and through axle hubs
- Through axle hubs are supported with use of the adapters (included with truing stand)
- One pair of through axle adapters support all sizes of through axles







	D	E	L	L	H	L	L1	
640434	390	40	40	226	525	298	342	8550

* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.

사용법 (사진)

관련 제품


Pro Truing stand upgrade set