

# Ključ viljuškasti jednostrani, izolovan

110/2VDEDP



## Profili



## Standardi

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

## Opis proizvoda

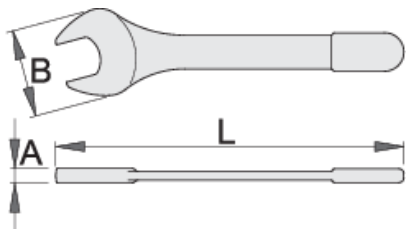
- materijal: premium hrom-vanadijum čelik
- glava: hromirana (ISO 1456:2009)
- izrađen prema standardu ISO 7738; EN IEC 60900:2018




## Prednosti:

- obložen duplim izolacionim slojem sa dve boje, koje omogućuju dodatnu sigurnost
- kontrolisano električnim testom

## Važno!

- ukoliko je vidljiv drugi sloj, zamenite svoj VDE alat novim.



|  |  | L   | B    | A    |  |
|--|---|-----|------|------|---|
| 618370   | 6   | 72  | 16   | 6.9  | 19  |
| 618331   | 7   | 82  | 16.1 | 6.9  | 26  |
| 617801   | 8   | 95  | 21   | 7    | 30  |
| 621575   | 9   | 100 | 24.5 | 7.5  | 35  |
| 612175   | 10  | 105 | 24.5 | 7.5  | 42  |
| 612176   | 11  | 112 | 26   | 7.5  | 51  |
| 612177   | 12  | 125 | 28   | 8    | 65  |
| 612178   | 13  | 132 | 30.5 | 8.5  | 76  |
| 612179   | 14  | 140 | 33   | 8.5  | 84  |
| 612180   | 15  | 150 | 35   | 9    | 96  |
| 621576   | 16  | 154 | 40   | 10   | 118   |
| 612181   | 17  | 157 | 40   | 10   | 137   |
| 621577   | 18  | 165 | 44   | 11   | 151   |
| 612182   | 19  | 170 | 44   | 11   | 170   |
| 618333   | 20  | 175 | 46.4 | 12.2 | 184   |
| 619201   | 21  | 180 | 48.8 | 12.5 | 213   |
| 612183   | 22  | 195 | 49   | 13   | 234   |
| 618335   | 23  | 210 | 52.8 | 13.1 | 251   |
| 612184   | 24  | 220 | 56   | 14   | 311   |
| 621578   | 26  | 235 | 59   | 15   | 361   |
| 617802   | 27  | 240 | 59   | 15   | 387   |
| 621579   | 28  | 245 | 66   | 15.8 | 440   |
| 618336   | 30  | 260 | 66.1 | 15.8 | 518   |
| 618337   | 32  | 275 | 71.4 | 17.6 | 620   |

\* Fotografije proizvoda su simbolične. Sve dimenzije su u mm, a težina u gramima. Sve navedene dimenzije mogu odstupati u granicama tolerancija.

## Upotreba (slike)

