

# Insulated single offset ring wrench

180/2VDEDP



## Profiles



## Standards

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

## Product features


- material: premium chrome vanadium steel
- head: chrome plated according to ISO 1456:2009
- made according to standard ISO 10104 and EN IEC 60900:2018

## Advantages:

- double layered - double coloured insulation for additional safety
- controlled according to standard EN IEC 60900

## Important!

- if second layer is visible, replace your insulated tool with a new one.

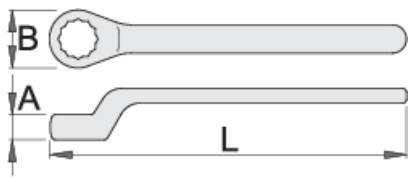

|  |  | L   | B    | A    |  |
|--|---|-----|------|------|---|
| 621580   | 6   | 155 | 13.5 | 8.5  | 51  |
| 621581   | 7   | 155 | 15   | 9    | 57  |
| 621582   | 8   | 160 | 16.5 | 9.5  | 62  |
| 621583   | 9   | 160 | 17.5 | 10   | 72  |
| 612185   | 10  | 162 | 19.5 | 11   | 81  |
| 612186   | 11  | 175 | 20   | 11.5 | 97  |
| 612187   | 12  | 185 | 21.5 | 11.5 | 112   |
| 612188   | 13  | 185 | 23   | 12.5 | 113   |
| 612189   | 14  | 190 | 25.5 | 13   | 136   |
| 612190   | 15  | 195 | 27   | 13.5 | 146   |
| 621584   | 16  | 190 | 27.5 | 14.5 | 175   |
| 612191   | 17  | 208 | 30.5 | 15.5 | 185   |
| 621585   | 18  | 195 | 30   | 15.5 | 210   |
| 612192   | 19  | 227 | 33   | 15.5 | 233   |
| 621586   | 20  | 245 | 34.5 | 16.2 | 273   |
| 619202   | 21  | 244 | 36.4 | 13.2 | 307   |
| 612193   | 22  | 250 | 37.5 | 17.5 | 300   |
| 621587   | 23  | 250 | 39.8 | 16.8 | 333   |
| 612194   | 24  | 255 | 42   | 18.5 | 428   |
| 621588   | 26  | 265 | 44   | 18   | 450   |
| 621589   | 27  | 270 | 44.8 | 18   | 411   |
| 621590   | 28  | 280 | 36.5 | 18.5 | 488   |
| 621591   | 30  | 310 | 47   | 19   | 574   |
| 621592   | 32  | 325 | 51.5 | 19.5 | 647   |

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.