

# Ključ nasadni 1/2", izoliran

190/2VDEDP



## Profili



## Standardi

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

## Atributi proizvoda

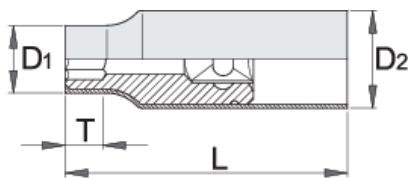
- materijal: krom-vanadij
- kovan, u cijelosti ojačan i zakaljen
- glava: kromirana (ISO 1456:2009)
- izrađeni prema standardu DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018




## Prednosti:

- obloženi dvostrukim izolacijskim slojem sa 2 boje, koje omogućuju dodatnu sigurnost
- kontrolirano prema standardu EN IEC 60900

Važno!

- ukoliko drugi sloj postane vidljiv, alat zamijenite novim.



|  |  | D1   | D2 | L  | T  |  |
|--|---|------|----|----|----|---|
| 617803   | 8   | 18   | 27 | 54 | 12 | 65  |
| 612195   | 10  | 19,5 | 27 | 54 | 12 | 72  |
| 612196   | 11  | 20,7 | 27 | 54 | 12 | 75  |
| 612197   | 12  | 22   | 27 | 54 | 12 | 74  |
| 612198   | 13  | 23,2 | 27 | 54 | 12 | 77  |
| 612199   | 14  | 24,5 | 27 | 54 | 12 | 72  |
| 621594   | 15  | 25,7 | 27 | 54 | 12 | 78  |
| 621595   | 16  | 27   | 27 | 54 | 12 | 82  |
| 612200   | 17  | 28,1 | 27 | 54 | 12 | 83  |
| 621596   | 18  | 29,5 | 27 | 54 | 12 | 94  |
| 612201   | 19  | 30,7 | 27 | 54 | 14 | 96  |
| 621597   | 20  | 32   | 27 | 54 | 14 | 106   |
| 621598   | 21  | 33,2 | 27 | 54 | 14 | 115   |
| 612202   | 22  | 34,5 | 27 | 54 | 14 | 108   |
| 612203   | 24  | 37   | 27 | 58 | 16 | 158   |
| 617804   | 27  | 41   | 27 | 59 | 18 | 176   |
| 621602   | 30  | 44,5 | 27 | 62 | 22 | 247   |
| 621603   | 32  | 47   | 27 | 62 | 22 | 284   |

\* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

## Frequently asked questions

### Can an insulated socket wrench be used with a normal ratchet?

A non-insulated socket wrench cannot be used with a normal ratchet because it has additional protection in the connection area.