

Insulated socket 1/2", 6 point

190/2VDEDP



프로파일



표준

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

제품 특징


- 재질: 프리미엄 플렉스 크롬 바나듐 스틸
- drop forged, entirely hardened and tempered
- head: trivalent chrome plated according to ISO 1456:2009
- made according to standard ISO 2725-1 and EN IEC 60900:2018

장점:

- double layered - double coloured insulation for additional safety
- controlled according to standard EN IEC 60900

Important!

- if second layer is visible, replace your insulated tool with a new one.

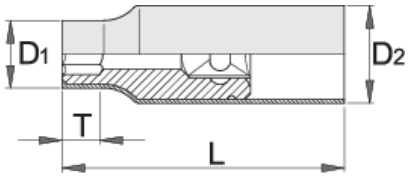

Barcode	mm	D1	D2	L	T	Weight
617803	8	18	27	54	12	65
612195	10	19,5	27	54	12	72
612196	11	20,7	27	54	12	75
612197	12	22	27	54	12	74
612198	13	23,2	27	54	12	77
612199	14	24,5	27	54	12	72
621594	15	25,7	27	54	12	78
621595	16	27	27	54	12	82
612200	17	28,1	27	54	12	83
621596	18	29,5	27	54	12	94
612201	19	30,7	27	54	14	96
621597	20	32	27	54	14	106
621598	21	33,2	27	54	14	115
612202	22	34,5	27	54	14	108
612203	24	37	27	58	16	158
617804	27	41	27	59	18	176
621602	30	44,5	27	62	22	247
621603	32	47	27	62	22	284

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

자주 묻는 질문

절연 소켓 렌치를 일반 라쳇과 함께 사용할 수 있습니까?

비절연 소켓 렌치는 연결 부위에 추가 보호 장치가 있기 때문에 일반 라쳇과 함께 사용할 수 없습니다.