

# Ronde buigtang

476/1VDEBI



## Profielen



## Standaard


DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018



## Product attributen

- materiaal: premium plus carbonstaal
- gesmeed, volledig gehard en getemperd
- kop gepolijst
- afwerking oppervlak: verchromd volgens EN12540-norm
- dubbel-component handvaten voor zeer intensief gebruik
- beantwoordt aan de ISO5745 en EN IEC 60900-norm

## Voordelen:

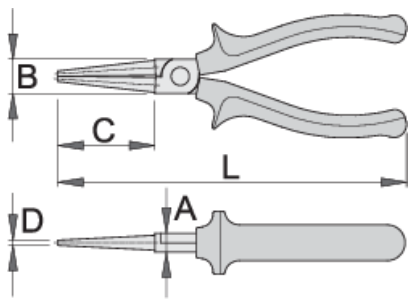
- lange bek maakt het mogelijk moeilijk bereikbare draden te bereiken
- minieme mogelijkheid tot beschadiging draden



	L	B	A	C	D	
610431	140	15	9	39	2	116
610432	160	16	10	49	2.5	126

\* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

## Gebruik (Afbeeldingen)



## Veelgestelde vragen

### **Are certified insulated tools made through a different procedure than non-certified insulated tools?**

The tools are made according to the same procedure.

### **Are insulated (VDE) tools considered as personal protective equipment (PPE)?**

According to EU regulations, VDE tools are not considered as PPE.

### **Is it possible to work with insulated pliers under electrical voltage?**

Yes, but only by professionals who follow safety requirements and use additional personal protective equipment.

### **Are the VDE tools only being sampled in series production?**

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.