

# Alicate punta semirredonda con corte y grip, recto, aislado

508/1VDEBI



## Perfiles



## Normas


DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

## Características del producto

- Material: composición especial para temple y endurecimiento
- totalmente templado y revenido
- filos templados por inducción
- cabezas pulidas
- acabado: cromado según ISO 1456:2009
- mangos en doble componente para trabajos duros
- fabricada totalmente de acuerdo con ISO 5745 y EN IEC 60900

## Ventajas:

- también para apretar y separar de los cables u otros objetos sensibles
- superficie de agarre dentada

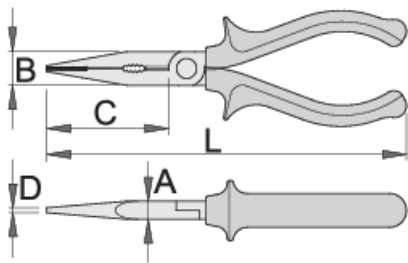

Barcode	L	B	D	A	C	Weight
610436	170	17	2.5	9	61	156
610437	200	17	2.5	9	77	191

capacidad de corte ( 10N=1Kg)

Barcode	L	max 1600 N/mm <sup>2</sup> Ø↑	max 650 N/mm <sup>2</sup> Ø↑
610436	170	1,6	3,0
610437	200	1,8	3,0

\* Las imágenes de los productos son simbólicas. Todas las dimensiones son en mm, peso en gramos.

## Preguntas frecuentes

### Are certified insulated tools made through a different procedure than non-certified insulated tools?

The tools are made according to the same procedure.

### Are insulated (VDE) tools considered as personal protective equipment (PPE)?

According to EU regulations, VDE tools are not considered as PPE.

### Is it possible to work with insulated pliers under electrical voltage?

Yes, but only by professionals who follow safety requirements and use additional personal protective equipment.

### Are the VDE tools only being sampled in series production?

The high voltage test (at 10kV) is performed fully on each tool. Other tests are performed in accordance with the EN60900 standard.