
Testues i tensionit 220-250 V

630VDE

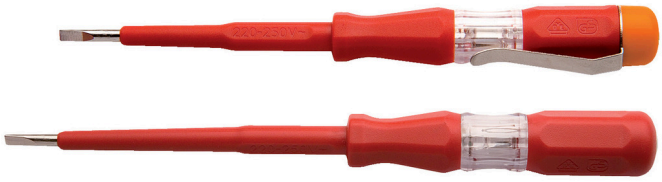

Profiles


1000V IEC 60900

Standards

DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018

Product features


- përmasat 140 me clip
- bërë sipas DIN EN IEC 60900 (VDE 0682-201):2019-04; EN IEC 60900:2018 standarde




	axb	C	L	
617659	0.5 x 3.0	60	140	16
617660	0.6 x 3.5	90	180	27

* Imazhet e produkteve janë simbolike. Të gjitha dimensionet janë në mm, pesha në gram.Të gjitha dimensionet e listuara mund të ndryshojnë në tolerancë.

Usage (pictures)



Ergonomik trajtuar projektimit për mbrojtjen e duart tuaja.



E madhe zona e kontaktit me dorë për më shumë pushtet çift rrotullues.



Related products

 Testues i rrymës për makinë 6-12/24V

 Testues i rrymës për makinë 6-12/24V

Safety tips

● Use a screw holding screwdriver to get screws started in awkward, hard-to-reach areas.

● Use a stubby screwdriver in close quarters where a conventional screwdriver cannot be used.

● A rounded tip should be redressed with a file; make sure edges are straight.

● Screwdrivers used in the shop are best stored in a rack. This way, the proper selection of the right screwdriver can be quickly made.

● Keep the screwdriver handle clean; a greasy handle is apt to cause accidents.

● A screwdriver should never be used as pry bar. If it is overstressed in this manner, the blade might break and send a particle of steel into the operator's arm or even towards his eyes.

● Don't use pliers on the handle of a screwdriver to get extra turning power. A wrench should only be used on the square shank or bolster of a screwdriver that is especially designed for that purpose.

● Don't expose a screwdriver blade to excessive heat as it may reduce the hardness of the blade.

● Don't use a screwdriver with a split or broken handle.

● Don't use a regular screwdriver to check a storage battery or to determine if an electrical circuit is live.