

# 敲击开口扳手

118/7



## 配置文件


**Premium** 

## 标准

DIN 133

## 产品属性

- 材料：特种工具钢
- 落锻，完全淬火与回火
- 表面处理：防腐蚀油
- 根据标准DIN 133生产

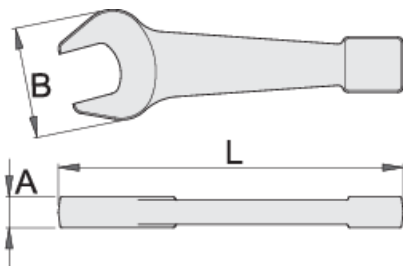

L

B

A



		L	B	A	
620466	24	170	56	15	489
620467	27	170	56	15	477
620468	30	200	70	18	863
620469	32	200	70	18	863
620470	36	200	70	18	834
620471	41	240	88	20	1490
620472	46	240	88	20	1450
620473	50	265	102	20	1790
620474	55	305	112	24	2700
620475	60	305	112	24	2615
620476	65	335	123	27	3645
620477	70	370	143	30	2200
620478	75	370	143	30	4865
620479	80	400	175	33	6450
620480	85	400	175	33	5775
620481	90	450	192	38	7620
620482	95	450	192	38	9400
620485	110	515	235	48	12400
620486	115	515	235	52	15800
620487	120	535	260	53	20000
620488	125	535	260	53	19200
620490	135	565	285	53	23400
620491	140	635	307	58	28800
620492	145	635	307	58	28800
620493	150	635	307	58	28200

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

用途 (pictures)



Photo (pictures)

