

# 敲击开口扳手

118/7



## 配置文件


**Premium** 

## 标准

DIN 133

## 产品属性

- 材料：特种工具钢
- 落锻，完全淬火与回火
- 表面处理：防腐蚀油
- 根据标准DIN 133生产

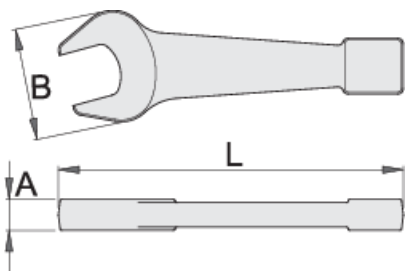



L

B

A



|        |  | L   | B   | A    |  |  |
|--------|---|-----|-----|------|---|---|
| 620466 | 24  | 180 | 53  | 15   | 317   |   |
| 620467 | 27  | 185 | 58  | 16   | 417   |   |
| 620468 | 30  | 200 | 66  | 17   | 452   |   |
| 620469 | 32  | 200 | 68  | 17   | 513   |   |
| 620470 | 36  | 220 | 78  | 19   | 754   |   |
| 620471 | 41  | 240 | 90  | 19   | 1000  |   |
| 620472 | 46  | 260 | 100 | 20.8 | 1180  |   |
| 620473 | 50  | 285 | 110 | 20.8 | 1600  |   |
| 620474 | 55  | 315 | 120 | 23.8 | 2086  |   |
| 620475 | 60  | 325 | 130 | 23.8 | 2310  |   |
| 620476 | 65  | 355 | 142 | 28.5 | 3645  |   |
| 620477 | 70  | 380 | 156 | 30.3 | 2200  |   |
| 620478 | 75  | 400 | 164 | 30.3 | 4865  |   |
| 620479 | 80  | 415 | 175 | 33.3 | 6200  |   |
| 620480 | 85  | 415 | 175 | 33.3 | 5775  |   |
| 620481 | 90  | 460 | 197 | 38   | 7620  |   |
| 620482 | 95  | 460 | 197 | 38   | 8800  |   |
| 620486 | 115   | 515 | 235 | 52   | 15800   |   |
| 620492 | 145   | 635 | 307 | 58   | 28800   |   |
| 620493 | 150   | 635 | 307 | 58   | 28200   |   |

\* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.

## 用途 (pictures)



## Photo (pictures)

