

# Oczkowy klucz do pobijania

184/7



## Profile




## Standardy

DIN 7444

## Cechy produktu

- materiał: stal chromo- wanadowa premium
- kuty matrycowo, całkowicie utwardzany i odpuszczany
- wykończenie powierzchni : zabezpieczenie antykorozyjne w kąpeli olejowej
- Wykonany zgodnie z DIN 7444 ( tylko rozmiary metryczne )

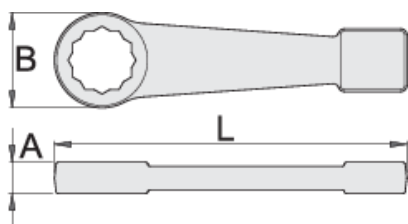

620494



24

L

180

B

48.6

A

16



534






L

B

A



620495	27	180	48.6	16	514
620496	30	180	48.6	16	488
620497	32	190	58.4	18	739
620498	36	190	58.4	18	694
620499	41	235	74	22	1425
620500	46	235	74	22	1360
620501	50	235	74	22	1272
620502	55	275	97.6	27	2800
620503	60	275	97.6	27	2710
620504	65	275	97.6	27	2580
620505	70	335	117	35	4685
620506	75	335	117	35	4570
620507	80	350	124	35	4305
620508	85	358	130	39	4220
620509	90	395	144	41	5335
620510	95	395	144	39	5090
620511	100	420	155	43	6800
620512	105	420	155	42	5930
620513	110	451	170	46	8200
620515	120	500	190	52	11400
620516	125	500	190	53	10800
620518	135	520	200	60	13800
620519	140	574	220	61	17000
620520	145	574	220	60	16600
620521	150	574	220	61	17000
620522	1.1/16"	180	49	16	512
620523	1.1/8"	180	49	16	511
620525	1.1/4"	190	58	18	740
620526	1.5/16"	190	58	18	708

		L	B	A	
620527	1.3/8"	190	58	18	700
620528	1.7/16"	190	58	18	687
620529	1.1/2"	235	74	22	1470
620530	1.5/8"	235	74	22	1425
620531	1.11/16"	235	74	22	1440
620533	1.13/16"	235	74	22	1360
620534	1.7/8"	235	74	22	1350
620535	2"	235	74	22	1335
620536	2.1/16"	275	98	27	2831
620537	2.1/8"	275	98	27	2840
620538	2.3/16"	275	98	27	2800
620539	2.1/4"	275	98	27	2730
620541	2.3/8"	275	98	27	2710
620542	2.1/2"	275	98	27	2580
620543	2.9/16"	275	98	27	2580
620544	2.5/8"	335	117	28.5	4685
620545	2.3/4"	335	117	35	4685
620546	2.15/16"	335	117	35	4520
620547	3"	335	117	35	4570
620548	3.1/8"	350	124	35	4305

\* Przedstawiony wygląd produktu jest orientacyjny. Wszystkie wymiary są w mm, podana waga w gramach

Fotografia (Obrazy)

