

# Alternator combination socket

2209





## Profielen



## Product attributen

- This two-part tool for the alternator allows the easy dismounting and mounting of the alternator pulley for the purposes of pulley replacement or alternator repair. The alternator is blocked by means of a 10 mm XZN multispline insert; simultaneously, the pulley retaining screw on the shaft is released/tightened. The tool is available as a 1/2" socket key with a XZN – M10 bit and as a 1/2" socket key with a TX50 bit.

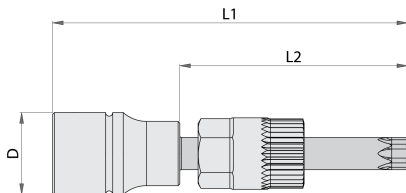

		D	L1	L2	
620225	M 10	23.8	113	75	178
620948	TX 50	23.8	113	75	176

\* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm, en het gewicht in grammen. Alle vermelde afmetingen kunnen variëren in tolerantie.

## Gebruik (Afbeeldingen)

