


Alternator combination socket

2209



Gebruik




Profielen



([/be/support/warranty](http://be/support/warranty)).

Product attributen

- This two-part tool for the alternator allows the easy dismounting and mounting of the alternator pulley for the purposes of pulley replacement or alternator repair. The alternator is blocked by means of a 10 mm XZN multispline insert; simultaneously, the pulley retaining screw on the shaft is released/tightened. The tool is available as a 1/2" socket key with a XZN – M10 bit and as a 1/2" socket key with a TX50 bit.

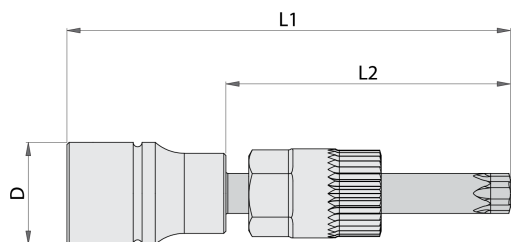

		D	L1	L2	
620225	M 10	23.8	113	75	178
620948	TX 50	23.8	113	75	176



Retail verpakking

Barcode	MA	MB	MC	Icon
620225	185	44	44	181
620948	185	44	44	181

Transport verpakking

Barcode	Hand icon	TA	TB	TC	Icon
620225	4	91	230	62	784
620948	4	91	230	62	784