


익스터널 락링 플라이어 (스트레이트)

532/1P



프로파일

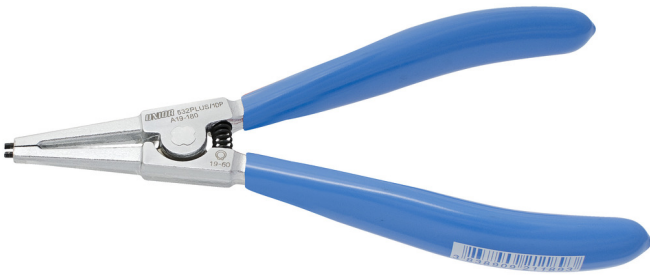

제품 특징


- 재질: 프리미엄 플러스 카본 스틸
- 낙하 단조, 완전 경화 및 담금질
- 헤드 폴리싱 처리
- 표면 마감: ISO 1456:2009에 따른 크롬 도금
- 블랙 마감된 팁
- handles plastic dipped
- DIN 5254 형식 A 표준에 따라 제작

장점:

- 편리한 락 링 플라이어에 비해 30% 더 높은 내구성
- 삽입용 팁 포함
- dimension 300mm with standard tips
- 3에서 100MM 직경용

용도:




- 샤프트의 서클립 장착용

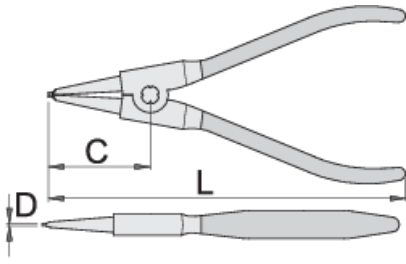

	L		D	C	
621187	140	3 - 10	0.9	40	127
621188	140	10 - 25	1.3	40	131
621189	180	19 - 60	1.8	52	209
621190	220	40 - 100	2.2	63	276
616734	300	85 - 140	3.2	86	502

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

사용법 (사진)



Tips hardened to 58 HRC prevent bending or breaking during the removal or insertion of circlips

The tips are inserted into the jaw at an angle that prevents the circlip from sliding off the tips

관련 제품



익스터널 락링 플라이어 (벤트)



인터널 락링 플라이어 (스트레이트)



인터널 락링 플라이어 (벤트)