


外卡簧钳，弯头

534/1P



配置文件

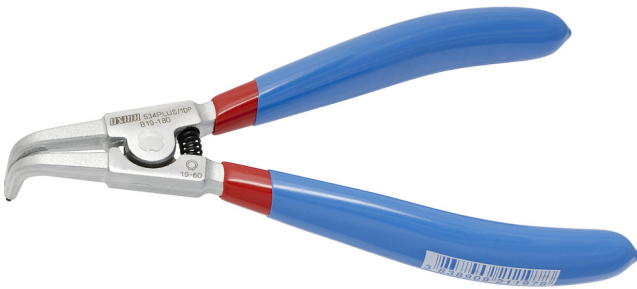

产品属性


- 材料:优质弹性高碳钢
- 落锻，完全淬火与回火
- 头部抛光
- 表面处理：依据ISO 1456:2009进行镀铬处理
- 尖端发黑处理
- 根据DIN5254标准表单B生产
- 浸塑料手柄

优势：

- 比便捷式卡簧钳高出30%的耐用性
- 内嵌卡针
- dimension 300mm with standard tips
- 用于直径10至100mm

用途：




- 用于轴上的装配卡簧

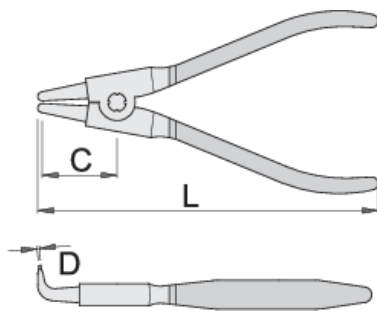

			L	D	C	
621195	140	3 - 10	128	0.9	28	134
621196	140	10 - 25	128	1.3	28	124
621197	180	19 - 60	166	1.8	38	204
621198	220	40 - 100	201	2.3	48	274
616737	300	85 - 140	280	3.2	68	502

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

用途 (pictures)



尖端淬火至58 HRc以防止在移除或插入卡簧时发生弯曲或断裂

卡针角度设计以防止卡簧的掉落

Related products

外卡簧钳，直头

内卡簧钳，直头

内卡簧钳，弯头