


外卡簧钳，弯头

534/1P



配置文件

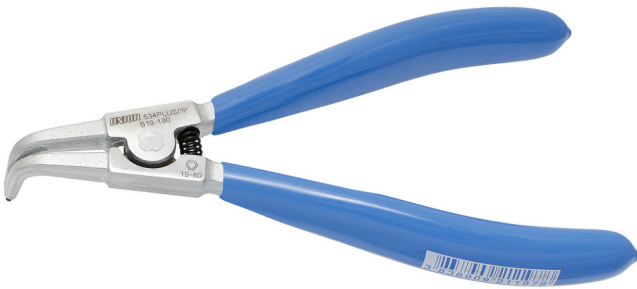

产品属性


- 材料:优质弹性高碳钢
- 落锻，完全淬火与回火
- 头部抛光
- 表面处理：依据ISO 1456:2009进行镀铬处理
- 尖端发黑处理
- 根据DIN5254标准表单B生产
- 浸塑料手柄

优势：

- 比便捷式卡簧钳高出30%的耐用性
- 内嵌卡针
- dimension 300mm with standard tips
- 用于直径10至100mm

用途：




- 用于轴上的装配卡簧

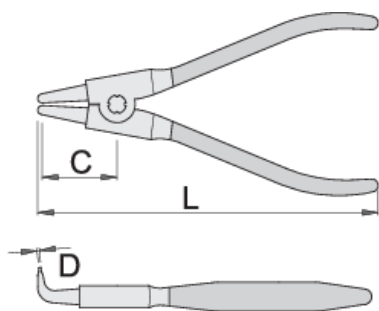

Barcode	Length	Weight	L	D	C	Weight
621195	140	3 - 10	128	0.9	28	134
621196	140	10 - 25	128	1.3	28	124
621197	180	19 - 60	166	1.8	38	204
621198	220	40 - 100	201	2.3	48	274
616737	300	85 - 140	280	3.2	68	502

* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.

用途 (pictures)



尖端淬火至58 HRc以防止在移除或插入卡簧时发生弯曲或断裂

卡针角度设计以防止卡簧的掉落

Related products

