


# 익스터널 락링 플라이어 (벤트)

534/1P



## 프로파일

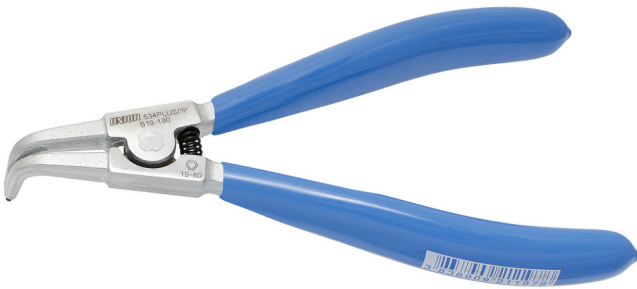

## 제품 특징


- 재질: 프리미엄 플러스 카본 스틸
- 낙하 단조, 완전 경화 및 담금질
- 헤드 폴리싱 처리
- 표면 마감: ISO 1456:2009 표준에 따른 크롬 도금
- 블랙 마감된 팁
- DIN 5254 형식 B 표준에 따라 제작
- handles plastic dipped

## 장점:

- 편리한 락 링 플라이어에 비해 30% 더 높은 내구성
- 삽입용 팁 포함
- dimension 300mm with standard tips
- 3에서 100MM 직경용

## 용도:




● 샤프트의 서클립 장착용

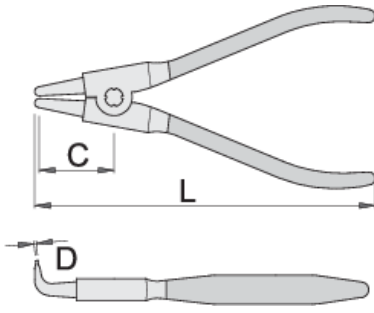

Barcode	Length	Weight	L	D	C	Weight
621195	140	3 - 10	128	0.9	28	134
621196	140	10 - 25	128	1.3	28	124
621197	180	19 - 60	166	1.8	38	204
621198	220	40 - 100	201	2.3	48	274
616737	300	85 - 140	280	3.2	68	502

\* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.


사용법 (사진)




Tips hardened to 58 HRC prevent bending or breaking during the removal or insertion of circlips

The tips are inserted into the jaw at an angle that prevents the circlip from sliding off the tips

관련 제품

 익스터널 락링 플라이어 (스트레이트)

 인터널 락링 플라이어 (스트레이트)

 인터널 락링 플라이어 (벤트)