


内卡簧钳，弯头

538/1P



配置文件

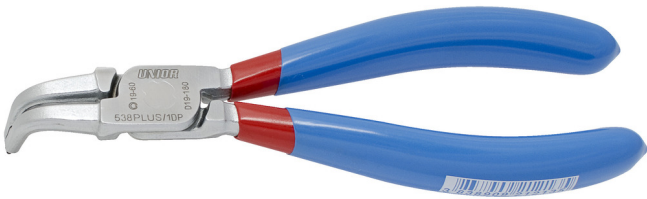

产品属性


- 材料:优质弹性高碳钢
- 落锻，完全淬火与回火
- 头部抛光
- 表面处理：依据ISO 1456:2009进行镀铬处理
- 尖端发黑处理
- 浸塑料手柄
- 根据DIN 5256标准表单D生产

优势：

- 比便捷式卡簧钳高出30%的耐用性
- 用于直径8至100mm
- 内嵌卡针
- dimension 300mm with standard tips

用途：




- 用于钻孔上的装配卡簧

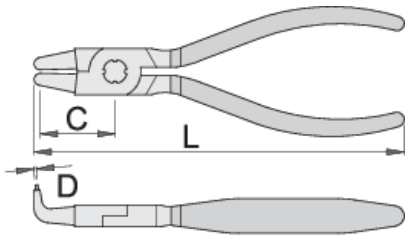

			L	D	C	
621211	140	8 - 13	128	0.9	28	114
621212	140	12 - 25	128	1.3	28	114
621213	180	19 - 60	166	1.8	38	194
621214	220	40 - 100	202	2.3	48	244
616743	300	85 - 140	295	3.2	68	501

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

用途 (pictures)



尖端淬火至58 HRc以防止在移除或插入卡簧时发生弯曲或断裂

卡针角度设计以防止卡簧的掉落

Related products

外卡簧钳，直头

外卡簧钳，弯头

内卡簧钳，直头