


# 인터널 락링 플라이어 (벤트)

538/1P



## 프로파일

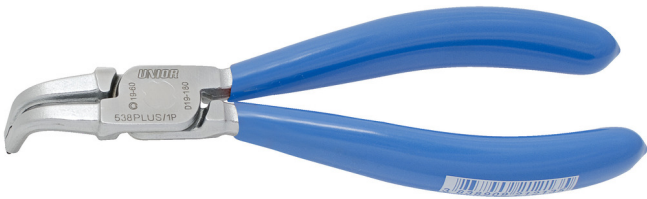

## 제품 특징


- 재질: 프리미엄 플러스 카본 스틸
- 낙하 단조, 완전 경화 및 담금질
- 헤드 폴리싱 처리
- 표면 마감: ISO 1456:2009 표준에 따른 크롬 도금
- 블랙 마감된 팁
- handles plastic dipped
- DIN 5256 형식 D 표준에 따라 제작

## 장점:

- 편리한 락 링 플라이어에 비해 30% 더 높은 내구성
- 8에서 100MM 직경용
- 삽입용 팁 포함
- dimension 300mm with standard tips

## 용도:




- 보어 홀의 씨클립 장착용

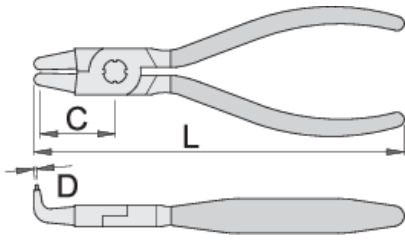

Barcode	Length (mm)	Weight (g)	L (mm)	D (mm)	C (mm)	Weight (g)
621211	140	8 - 13	128	0.9	28	114
621212	140	12 - 25	128	1.3	28	114
621213	180	19 - 60	166	1.8	38	194
621214	220	40 - 100	202	2.3	48	244
616743	300	85 - 140	295	3.2	68	501

\* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.

### 사용법 (사진)



Tips hardened to 58 HRC prevent bending or breaking during the removal or insertion of circlips

The tips are inserted into the jaw at an angle that prevents the circlip from sliding off the tips

### 관련 제품



익스터널 락링 플라이어 (스트레이트)



익스터널 락링 플라이어 (벤트)



인터널 락링 플라이어 (스트레이트)