


# 인터널 락링 플라이어 (스트레이트)

536/1P



## 프로파일

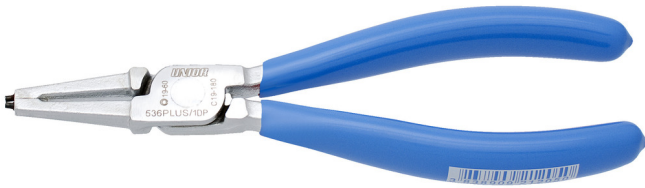

## 제품 특징


- 재질: 프리미엄 플러스 카본 스틸
- 낙하 단조, 완전 경화 및 담금질
- 헤드 폴리싱 처리
- 표면 마감: ISO 1456:2009에 따른 크롬 도금
- 블랙 마감된 팁
- 이중 플라스틱 처리된 손잡이
- DIN 5256 형식 C 표준에 따라 제작

## 장점:

- 편리한 락 링 플라이어에 비해 30% 더 높은 내구성
- 삽입용 팁 포함
- dimension 300mm with standard tips
- 8에서 100MM 직경용

## 용도:




- 보어 홀의 씨클립 장착용

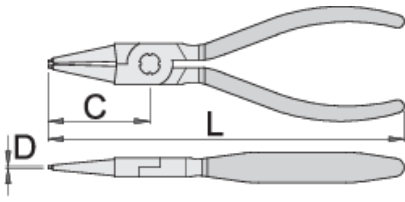


| Barcode | L   | Weight   | D   | C  | Weight |
|---------|-----|----------|-----|----|--------|
| 621203  | 140 | 8 - 13   | 0.9 | 40 | 111    |
| 621204  | 140 | 12 - 25  | 1.3 | 40 | 115    |
| 621205  | 180 | 19 - 60  | 1.8 | 52 | 192    |
| 621206  | 220 | 40 - 100 | 2.2 | 63 | 251    |
| 616740  | 300 | 85 - 140 | 3.2 | 86 | 491    |

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

### 사용법 (사진)

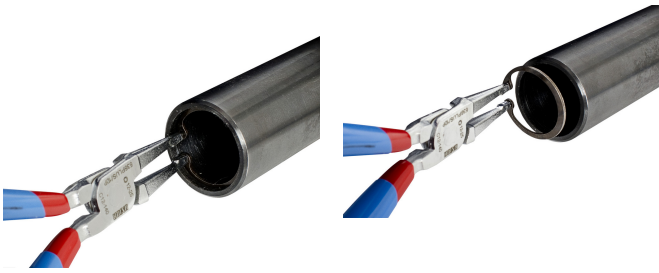

Tips hardened to 58 HRC prevent bending or breaking during the removal or insertion of circlips



The tips are inserted into the jaw at an angle that prevents the circlip from sliding off the tips

### 관련 제품



익스터널 락링 플라이어 (스트레이트)



익스터널 락링 플라이어 (벤트)



인터널 락링 플라이어 (벤트)