

Garnitura izvijača u SOS ulošku

964/33SOS



Profili



Atributi proizvoda

- Dimenzija uloška: 564 x 364 x 30 mm
- Za Eurostyle, Eurovision, Euromotion, Europlus i Hercules ladice za kolica (prednje ladice)

Set sadrži:

- 5x izvijač plosnati TBI (artikal 605TBI) dim. 0.5x3.0x80, 0.8x4.0x100, 1.0x5.5x125, 1.2x6.5x150, 1.6x8.0x175
- 4x križni izvijač TBI (artikal 615TBI) dim. PH 0x60, PH 1x80, PH 2x100, PH 3x150
- 2x izvijač plosnati kratki TBI (artikal 627TBI) dim. 1.0x5.5x25, 1.2x6.5x25
- 2x izvijač križni (PH) kratki TBI (artikal 626TBI) dim. PH 1x25, PH 2x25
- 9x izvijač TBI s TX profilom (artikal 621TBI) dim. TX 6, TX 8, TX 10, TX 15, TX 20, TX 25, TX 27, TX 30, TX 40
- 8x izvijač nasadni TBI (artikal 629TBI) dim. 6, 7, 8, 9, 10, 11, 12, 13

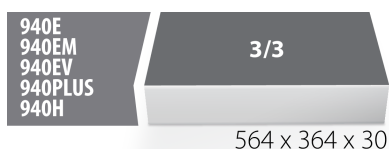
SOS ulošci za alat - prednosti:







- Materijal: polietilenska pjena niske gustoće

- SOS ulošci za alat izrađeni su od dvoslojne poliuretanske pjene, otporne na maziva, benzin, ulja, nitro razrjeđivače, ljepila i motorna ulja - sve ovo može se jednostavno ukloniti bez ikakvih vidljivih ostataka ili mrlja. Ljepila i motorna ulja moraju se odmah ukloniti čišćenjem benzinom kako bi se izbjegle trajne mrlje. Ovi ulošci za alat su otporni u uobičajenim uvjetima te ne mijenjaju oblik sve do temperature od 80 °C.
- Ovi umetci za alat od polietilenske pjene koriste se za preglednije i bolje organizirano skladištenje alata u kutijama za alat, ladicama kolica za alat i ormarima za alat. Mogu se koristiti u širokom rasponu temperatura, ne upijaju vlagu i, uz normalnu upotrebu, imaju dug vijek trajanja. Štite alat tako što ga drže na vlastitom posebno dizajniranom mjestu i na taj način sprječavaju njegovo nekontrolirano kretanje po skladišnom prostoru. Kako su pozicije u ladici točno definirane i dizajnirane za svaki pojedini alat, također je lako ustanoviti koji alati nedostaju.

Zašto odabrati UNIOR:

- Unior je renomirana robna marka u industriji, poznata po predanosti kvaliteti i inovacijama. S ostavštinom izvrsnosti, Unior alati su izrađeni da zadovolje najviše standarde, osiguravajući pouzdanost i izvanredne performanse.



Naziv proizvoda	SKU	Članak	Standardi	Količina
Garnitura izvijača u SOS ulošku	621392	964/33SOS	-	30
Izvijač plosnati TBI		605TBI	0.5 x 3.0x80, 0.8 x 4.0x100, 1.0 x 5.5x125, 1.2 x 6.5x150, 1.6 x 8.0x175	5
Izvijač križni (PH) TBI		615TBI	PH 0x60, PH 1x80, PH 2x100, PH 3x150	4
Izvijač križni (PH) kratki TBI		626TBI	PH 1x25, PH 2x25	2
Izvijač plosnati kratki TBI		627TBI	1.0 x 5.5x25, 1.2 x 6.5x25	2
Izvijač Torx TBI		621TBI	TX 6, TX 8, TX 10, TX 15, TX 20, TX 25, TX 27, TX 30, TX 40	9
Izvijač nasadni TBI		629TBI	6, 7, 8, 9, 10, 11, 12, 13	8
SOS uložak za art. 964/33SOS		vI964/33SOS	564x364x30	1

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

Safety tips



- Use a screw holding screwdriver to get screws started in awkward, hard-to-reach areas.
- Use a stubby screwdriver in close quarters where a conventional screwdriver cannot be used.
- A rounded tip should be redressed with a file; make sure edges are straight.
- Screwdrivers used in the shop are best stored in a rack. This way, the proper selection of the right screwdriver can be quickly made.
- Keep the screwdriver handle clean; a greasy handle is apt to cause accidents.
- A screwdriver should never be used as pry bar. If it is overstressed in this manner, the blade might break and send a particle of steel into the operator's arm or even towards his eyes.



- Don't use pliers on the handle of a screwdriver to get extra turning power. A wrench should only be used on the square shank or bolster of a screwdriver that is especially designed for that purpose.
- Don't expose a screwdriver blade to excessive heat as it may reduce the hardness of the blade.
- Don't use a screwdriver with a split or broken handle.
- Don't use a regular screwdriver to check a storage battery or to determine if an electrical circuit is live.