

# Bolt cutter

596/6A



## Profiles




## Product features

- material: cutters from premium plus carbon steel
- cutting edges separately induction hardened
- steel handles, lacquered, heavy duty plastic handles

## Advantages:

- shock-absorbers on the joints absorb shocks on the handles, which happen when cutting reinforcing rod
- protection of the eccentric screws for adjustment of blades with forged recesses ensures 100% protection against unscrewing

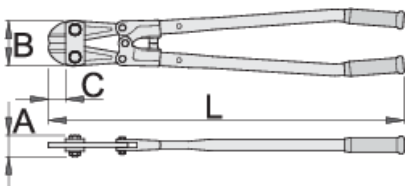

610963

L

300

A

26

B



40

C


16



737

	L	A	B	C	
610964	350	26	55	24	805
610965	450	34	70	36	1500
610966	600	38	84	40	2600
610967	750	43	96	46	3950
610968	900	47	109	50	6300
612984	1050	48	120	46	6900

### cutting capacity (10N=1kg)

	L	max 1600 N/mm <sup>2</sup> Ø↑	max 650 N/mm <sup>2</sup> Ø↑
610963	300	3	5
610964	350	3,5	5
610965	450	5	8
610966	600	7	10
610967	750	8	13
610968	900	9	16
612984	1050	10	19

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

### Usage (pictures)



### Photo (pictures)



Spare parts



Spare parts for 596/6A

## Frequently asked questions

**Can we eliminate the clearance between the blades of the bolt cutter?**

Of course. The procedure is described in the instructions.