

# Boutenschaar met verwisselbare driekant snijmessen

596PLUS/6G



## Profielen

---



## Product attributen

- materiaal: premium hard chroom vanadiumstaal
- jaws exchangeable and adjustable in three position, entirely hardened and tempered
- steel handles, lacquered, heavy duty plastic handles


## Voordelen:

- extreme strength and minimum weight
- outstanding resistance to the maximum forces generated during cutting
- complete anti-corrosion resistance
- straightforward guidance and proper handling
- shock absorber for the prevention of injuries
- triangular blade - threefold longer service life
- the procedure for adjusting the jaw cutting edges

## How to adjust the cutting edges?

- Release the safety nut.
- Take the screw out of the groove and turn it until there is no spacing between the cutting edges

- Secure the safety nut.

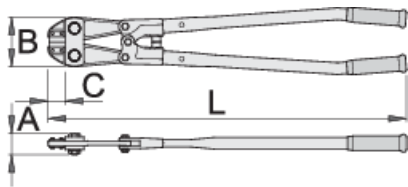



|        | L   | A  | B   | C  |      |
|--------|-----|----|-----|----|------|
| 615256 | 750 | 43 | 96  | 46 | 4060 |
| 615257 | 900 | 47 | 109 | 50 | 6300 |

knipcapaciteit (10N=1kg)

|        | L   | max 1600 N/mm <sup>2</sup> Ø↑ | max 650 N/mm <sup>2</sup> Ø↑ |
|--------|-----|-------------------------------|------------------------------|
| 615256 | 750 | 8                             | 13                           |
| 615257 | 900 | 9                             | 16                           |

\* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

### Gebruik (Afbeeldingen)



### Onderdelen



Reserve bek voor 596PLUS/6G



Reserve onderdelen driekant snijmes voor 596PLUS/6G



## Veelgestelde vragen

### **Can we eliminate the clearance between the blades of the bolt cutter?**

Of course. The procedure is described in the instructions.

### **If we change the triangular blade, do we have to adjust the clearance as well?**

When installing, it is necessary to make sure that the blades are installed in parallel and that the screws are tightened accordingly.