Boutenschaar met verwisselbare driekant snijmessen

596PLUS/6G



Profielen

Product attributen

- materiaal: premium hard chroom vanadiumstaal
- jaws exchangeable and adjustable in three position, entirely hardened and tempered
- steel handles, lacquered, heavy duty plastic handles


Voordelen:

- extreme strength and minimum weight
- outstanding resistance to the maximum forces generated during cutting
- complete anti-corrosion resistance
- straightforward guidance and proper handling
- shock absorber for the prevention of injuries
- triangular blade - threefold longer service life
- the procedure for adjusting the jaw cutting edges

How to adjust the cutting edges?

- Release the safety nut.
- Take the screw out of the groove and turn it until there is no spacing between the cutting edges

- Secure the safety nut.

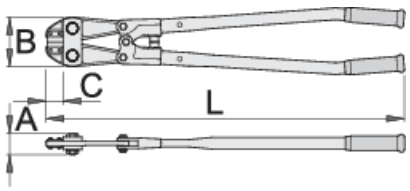

			L	C	
615256	750	30	750	46	4060
615257	900	36	900	50	6300


knipcapaciteit (10N=1kg)


	L	max 1560 N/mm² Ø	max 750 N/mm² Ø
615256	750	8	13
615257	900	9	16

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Gebruik (Afbeeldingen)









Onderdelen


Reserve bek voor 596PLUS/6G


Reserve onderdelen driekant snijmes voor 596PLUS/6G

Veelgestelde vragen

Can we eliminate the clearance between the blades of the bolt cutter?
Of course. The procedure is described in the instructions.

If we change the triangular blade, do we have to adjust the clearance as well?
When installing, it is necessary to make sure that the blades are installed in parallel and that the screws are tightened accordingly.