

# Düz tornavida TBI

605TBI



## Profiles




## Standards

ISO 8764-1,2

## Product features

- bıçak: krom vanadyum molibden çelik, tamamen sertleştirilmiş ve temperlenmiş
- krom kaplamalı, kararlaştırılmış uç
- kol: ergonomik şekil
- üç bileşenli malzeme
- asma deliği
- ISO 2380-1,2 standardına göre yapılmıştır
- DIN 5264 standardına göre yapılmıştır

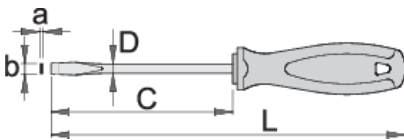


|  | axb       | C  | L   | D   |  |  |
|--|-----------|----|-----|-----|---|---|
| 612810   | 0.4 x 2.5 | 60 | 145 | 2.5 | 33  |   |
| 611687   | 0.4 x 2.5 | 75 | 160 | 2.5 | 34  |   |

|        | axb        | C   | L   | D   |     |                   |
|--------|------------|-----|-----|-----|-----|-------------------|
| 611688 | 0.5 x 3.0  | 80  | 165 | 3   | 35  |                   |
| 612811 | 0.5 x 3.0  | 100 | 185 | 3   | 37  |                   |
| 611689 | 0.5 x 3.0  | 125 | 210 | 3   | 37  | Till end of stock |
| 612812 | 0.5 x 3.0  | 150 | 235 | 3   | 39  | Till end of stock |
| 612813 | 0.6 x 3.5  | 75  | 160 | 3.5 | 37  | Till end of stock |
| 611690 | 0.6 x 3.5  | 100 | 185 | 3.5 | 39  |                   |
| 611692 | 0.8 x 4.0  | 100 | 185 | 4   | 41  |                   |
| 612814 | 0.8 x 4.0  | 125 | 210 | 4   | 44  |                   |
| 611693 | 0.8 x 4.0  | 150 | 235 | 4   | 46  |                   |
| 612815 | 0.8 x 4.0  | 200 | 285 | 4   | 53  | Till end of stock |
| 612816 | 1.0 x 5.5  | 100 | 200 | 5   | 68  |                   |
| 611694 | 1.0 x 5.5  | 125 | 225 | 5   | 70  |                   |
| 611695 | 1.0 x 5.5  | 150 | 250 | 5   | 74  |                   |
| 612817 | 1.2 x 6.5  | 100 | 210 | 6   | 93  |                   |
| 612818 | 1.2 x 6.5  | 125 | 235 | 6   | 98  |                   |
| 611696 | 1.2 x 6.5  | 150 | 260 | 6   | 103 |                   |
| 611697 | 1.2 x 6.5  | 200 | 310 | 6   | 115 |                   |
| 611698 | 1.2 x 8.0  | 175 | 295 | 7   | 143 |                   |
| 612819 | 1.6 x 8.0  | 175 | 295 | 7   | 143 |                   |
| 611699 | 1.6 x 10.0 | 200 | 320 | 8   | 173 |                   |
| 611700 | 2.0 x 12.0 | 250 | 370 | 9   | 223 |                   |

\* Ürünlerin resimleri semboliktir. Bütün boyutlar mm ve ağırlık gram cinsindedir.

## Usage (pictures)



# Safety tips



- Use a screw holding screwdriver to get screws started in awkward, hard-to-reach areas.
- Use a stubby screwdriver in close quarters where a conventional screwdriver cannot be used.
- A rounded tip should be redressed with a file; make sure edges are straight.
- Screwdrivers used in the shop are best stored in a rack. This way, the proper selection of the right screwdriver can be quickly made.
- Keep the screwdriver handle clean; a greasy handle is apt to cause accidents.
- A screwdriver should never be used as pry bar. If it is overstressed in this manner, the blade might break and send a particle of steel into the operator's arm or even towards his eyes.



- Don't use pliers on the handle of a screwdriver to get extra turning power. A wrench should only be used on the square shank or bolster of a screwdriver that is especially designed for that purpose.
- Don't expose a screwdriver blade to excessive heat as it may reduce the hardness of the blade.
- Don't use a screwdriver with a split or broken handle.
- Don't use a regular screwdriver to check a storage battery or to determine if an electrical circuit is live.

## Safety (pictures)

