

# TBI手柄一字电工螺丝刀

602TBI



## 配置文件







## 标准




DIN ISO 2380-1:2006 and DIN ISO 2380-2:2006
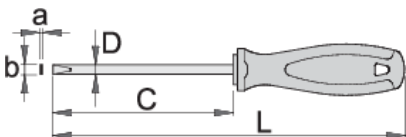
## 产品属性

- 螺丝刀：切割器 - 特种工具钢、锻造、完全淬火与回火，完全淬火与回火
- 镀铬刀片，黑色刀头
- 手柄：符合人体工程学的形状
- 三种成分组成的材料
- 挂孔




	axb	C	L	D		
612797	0.4 x 2.5	60	145	2.5	33	
612798	0.4 x 2.5	75	160	2.5	33	
611684	0.5 x 3.0	100	185	3	37	

	axb	C	L	D		
612799	0.5 x 3.0	150	235	3	39	Till end of stock
612800	0.6 x 3.5	100	185	3.5	39	
612801	0.8 x 4.0	100	185	4	43	
611685	0.8 x 4.0	125	210	4	45	Till end of stock
612802	0.8 x 4.0	150	235	4	48	
612803	0.8 x 4.0	250	335	4	56	
612804	1.0 x 5.5	125	225	5.5	75	
611686	1.0 x 5.5	150	250	5.5	81	Till end of stock
616843	1.0 x 5.5	280	380	5.5	103	Till end of stock
612805	1.2 x 6.5	150	260	6.5	113	Till end of stock
616844	1.2 x 6.5	280	390	6.5	145	Till end of stock
612806	1.2 x 8.0	175	295	8	163	Till end of stock

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

## 用途 (pictures)



## Safety tips



- Use a screw holding screwdriver to get screws started in awkward, hard-to-reach areas.
- Use a stubby screwdriver in close quarters where a conventional screwdriver cannot be used.
- A rounded tip should be redressed with a file; make sure edges are straight.
- Screwdrivers used in the shop are best stored in a rack. This way, the proper selection of the



- Don't use pliers on the handle of a screwdriver to get extra turning power. A wrench should only be used on the square shank or bolster of a screwdriver that is especially designed for that purpose.
- Don't expose a screwdriver blade to excessive heat as it may reduce the hardness of the blade.
- Don't use a screwdriver with a split or broken handle.

right screwdriver can be quickly made.

- Keep the screwdriver handle clean; a greasy handle is apt to cause accidents.
- A screwdriver should never be used as pry bar. If it is overstressed in this manner, the blade might break and send a particle of steel into the operator's arm or even towards his eyes.

- Don't use a regular screwdriver to check a storage battery or to determine if an electrical circuit is live.

### Safety (pictures)

