

# Odvijač TBI pljosnati sa OK ojačanjem

600TBI



## Profili






## Standardi




DIN ISO 2380-1:2006 i DIN ISO 2380-2:2006
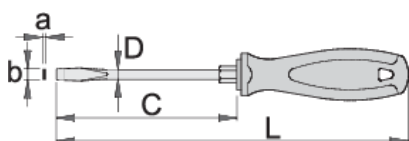
## Opis proizvoda

- stablo: premium hard hrom-vanadijum čelik, u celosti poboljšano
- vrh bruniran, površina stabla hromirana
- ručka ergonomski oblikovana
- ručica od trokomponentnog materijala
- otvor u dršci za kačenje
- izrađen prema standardu ISO 2380-1,2




	axb	C	L	D		
611680	1.0 x 5.5	100	200	5	8	68
611681	1.2 x 6.5	125	235	6	10	103

	axb	C	L	D		
611682	1.2 x 8.0	150	270	7	13	143
611683	1.6 x 10.0	175	295	8	13	171

\* Fotografije proizvoda su simbolične. Sve dimenzije su u mm, a težina u gramima. Sve navedene dimenzije mogu odstupati u granicama tolerancija.

### Upotreba (slike)



### Bezbednost (slike)

