

Izvlakač trokraki

682/2




Profili



Atributi proizvoda

- materijal: Premium Flex Plus alatni čelik
- kovana, potpuno poboljšana i ojačana
- završna obrada: kromiranje prema standardu ISO 1456:2009, vijak bruniran
- krakovi podesivi u dva položaja po visini

- krakove dobro pričvrstiti pod dio koji se izvlači

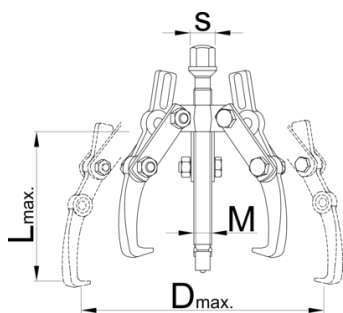

| | N ^o | L \uparrow | D \uparrow | f_{max} \rightarrow | t_{max} \rightarrow | M | S | |
|--------|----------------|--------------|--------------|-------------------------|-------------------------|------------|----|------|
| 612604 | 0 | 90 | 90 | 25 | 2.5 | M 10 x 1 | 13 | 305 |
| 601767 | 1 | 130 | 160 | 40 | 4 | M 14 x 1,5 | 17 | 1725 |
| 601768 | 2 | 190 | 230 | 50 | 5 | M 20 x 2 | 22 | 2570 |
| 601769 | 3 | 250 | 300 | 80 | 8 | M 22 x 2 | 24 | 5100 |

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

upotreba (pictures)




Rezervni dijelovi

Krak

Vreteno

Safety (pictures)

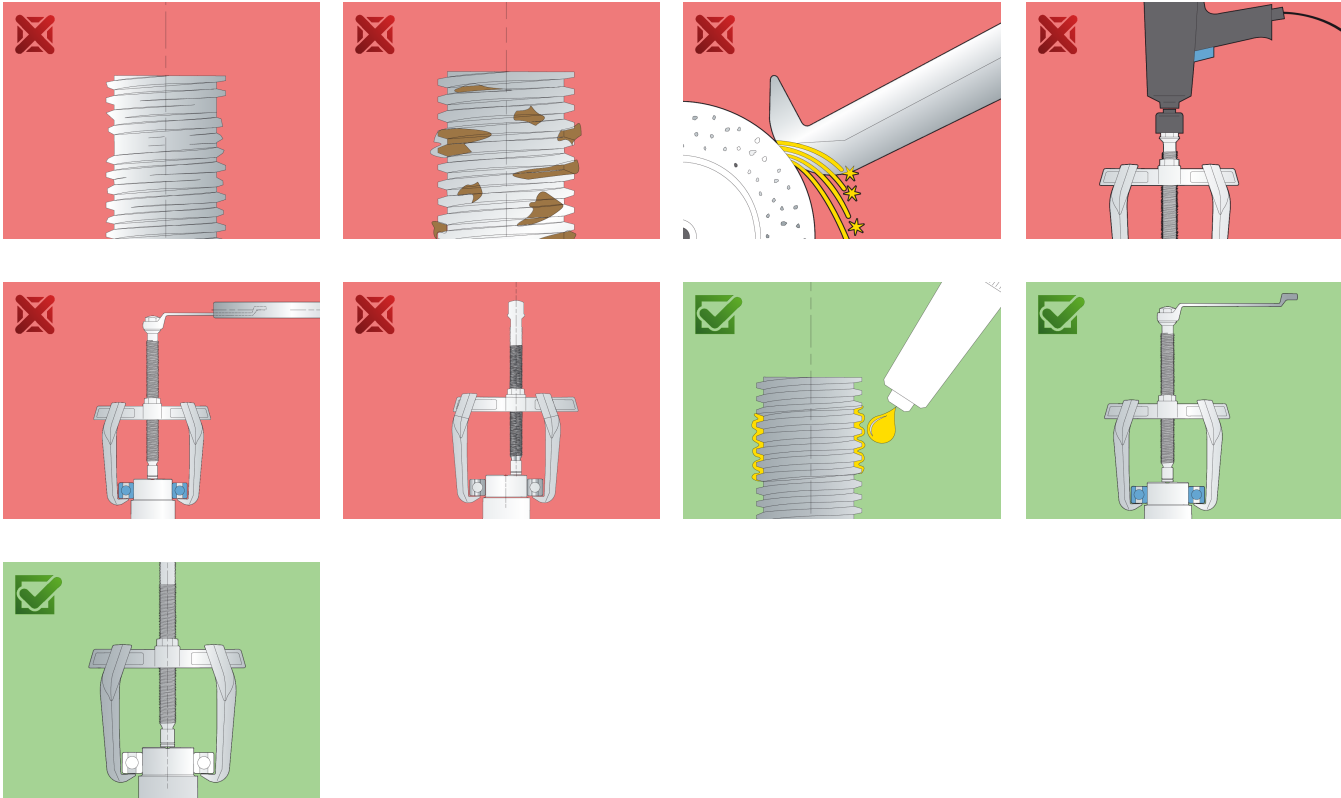

Frequently asked questions

Can we achieve greater pulling force using a three-arm puller compared to a two-arm puller?

It depends on the dimensions. In principle, yes, because the force is distributed over several arms.

One arm broke. Do I have to replace all the arms or just the broken one?

It is necessary to change all the arms.