Извлекувач со три крака

682/2




Profiles

Product features

- материјал: тело од специјален флекс плус јаглероден челик, раце од специјален хром ванадиум челик
- кован, целосно појачан и кален
- завршна површина: хромирана според EN 12540, појачан среден навртувач

- краци прилагодливи во две позиции по височина
- за време на употреба краците цврсто се поставуваат блиzу до делот за вадење



	№	L	D	Fmax	tmax	M	S	
612604	0	90	90	25	2.5	M 10 x 1	13	305
601767	1	130	160	40	4	M 14 x 1,5	17	1725
601768	2	190	230	50	5	M 20 x 2	22	2570
601769	3	250	300	80	8	M 22 x 2	24	5100

* Сликите на производите се симболични. Сите димензии се во мм, тежината е во грамови. Сите наведени димензии може да се разликуваат во ниво на толеранција

Usage (pictures)






Spare parts

 Крак

 Вретено

Safety (pictures)

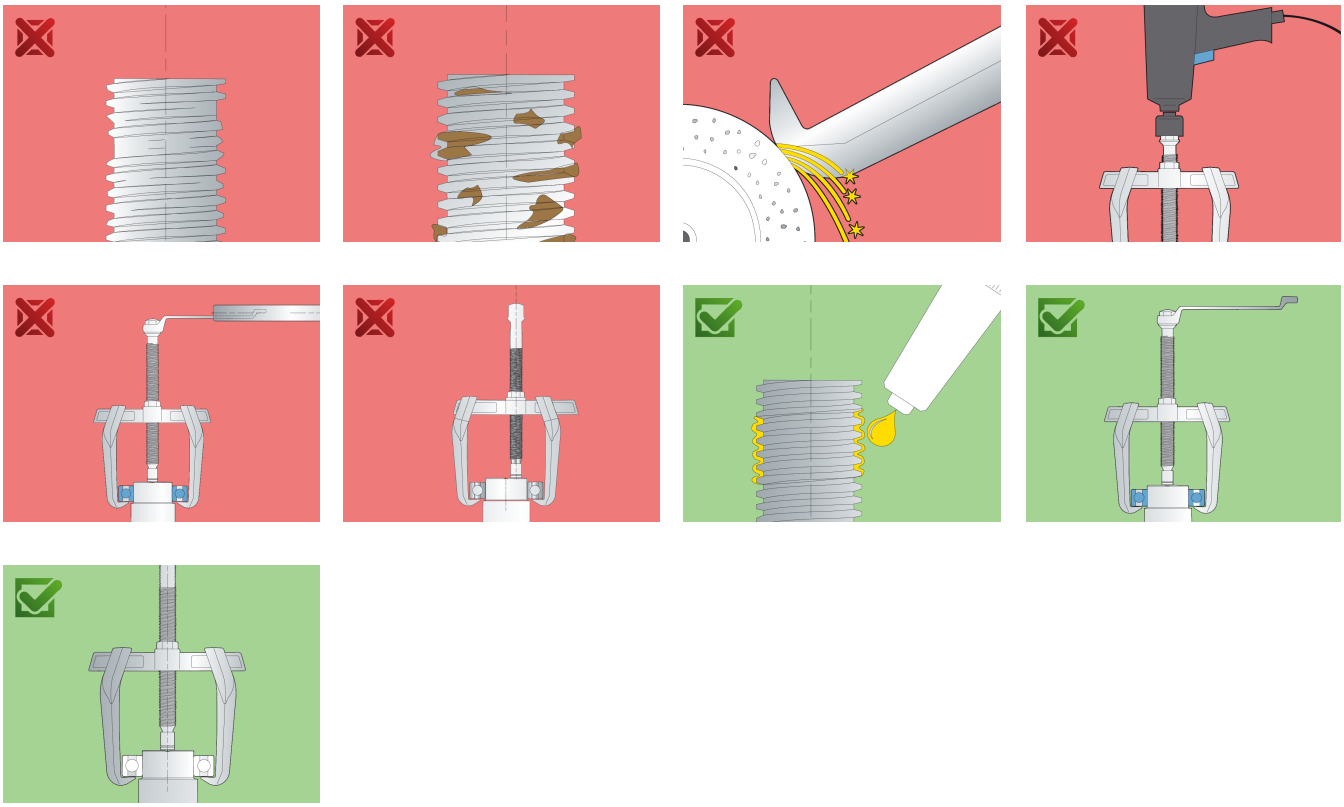

Frequently asked questions

Can we achieve greater pulling force using a three-arm puller compared to a two-arm puller?
It depends on the dimensions. In principle, yes, because the force is distributed over several arms.

One arm broke. Do I have to replace all the arms or just the broken one?
It is necessary to change all the arms.