

带两个滑动拉爪的拉拔器

683/2



配置文件




产品属性

- 材料：特种工具钢
- 落锻，完全淬火与回火
- 表面处理：根据ISO 1456:2009标准镀铬，螺钉发黑。
- 杠杆作用下拉爪紧密贴合部件下方，然后进行拆卸

优势：

- 通过翻转拉爪，拉拔器可作为内部或外部拉拔器使用

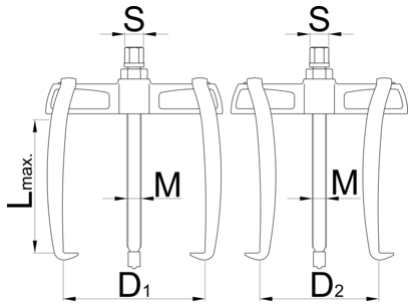

Barcode	Nº	L↑	D1	D2	F_{max} →	t_{max} →	M	S	Icon
615076	60	90	65	50 - 90	25	2.5	M 10x1	13	325
615077	90	90	90	50 - 110	25	2.5	M 10x1	13	395
615078	130	140	130	80 - 140	50	5	M 14x1,5	17	1125
615079	180	140	180	80 - 180	50	5	M 14x1,5	17	1225
615080	250	195	250	130 - 250	75	7.5	M 22x2	24	4025
615081	350	195	350	130 - 350	75	7.5	M 22x2	24	4525

* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.

用途 (pictures)



配件

 拉爪

 主轴

Related products



带两个拉爪的拉拔器












带两个滑动拉爪的拉拔器



带三个拉爪的拉拔器

Safety (pictures)

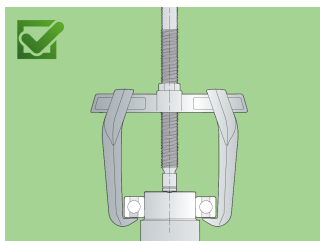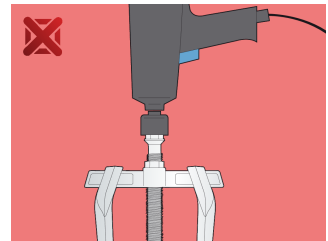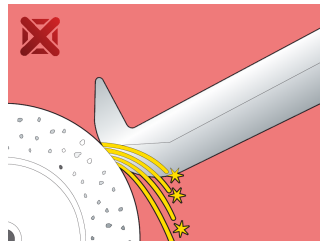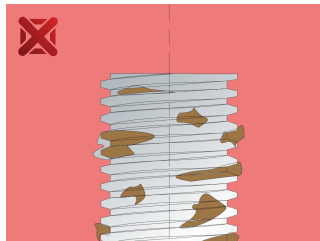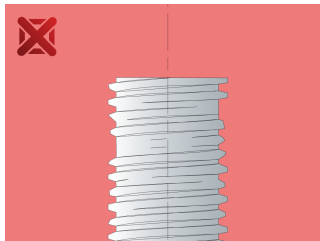

Frequently asked questions

Can we achieve greater pulling force using a three-arm puller compared to a two-arm puller?
It depends on the dimensions. In principle, yes, because the force is distributed over several arms.

One arm broke. Do I have to replace all the arms or just the broken one?

It is necessary to change all the arms.