

Извлекувач со два крака на лизгање

683/2



Profiles




Product features

- материјал: тело од специјален флекс плус јаглороден челик, раце од специјален хром ванадиум челик
- кован, целосно појачан и кален
- завршна површина: хромирана според EN 12540, појачан среден навртувач
- за време на употреба краците цврсто се поставуваат близу до делот за вадење

Предности:

- со одвртување на краците, извлекувачот може да се користи како внатрешен или надворешен извлекувач

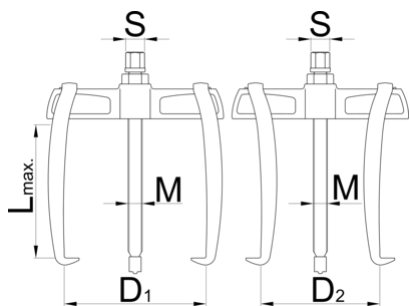

Barcode	№	L↑	D1	D2	F_{max} →	t_{max} →	M	S	Icon
615076	60	90	65	50 - 90	25	2.5	M 10x1	13	325
615077	90	90	90	50 - 110	25	2.5	M 10x1	13	395
615078	130	140	130	80 - 140	50	5	M 14x1,5	17	1125
615079	180	140	180	80 - 180	50	5	M 14x1,5	17	1225
615080	250	195	250	130 - 250	75	7.5	M 22x2	24	4025
615081	350	195	350	130 - 350	75	7.5	M 22x2	24	4525

* Сликите на производите се симболични. Сите димензии се во мм, тежината е во грамови. Сите наведени димензии може да се разликуваат во ниво на толеранција

Usage (pictures)



Spare parts



Крак

— Вретено

Related products



Извлекувач со два крака











Извлекувач со два крака на лизгање



Извлекувач со три крака

Safety (pictures)



Frequently asked questions

Can we achieve greater pulling force using a three-arm puller compared to a two-arm puller?
It depends on the dimensions. In principle, yes, because the force is distributed over several arms.

One arm broke. Do I have to replace all the arms or just the broken one?

It is necessary to change all the arms.