

Trekker, 2-armig

683/2



Profielen




Product attributen

- material: body from premium flex plus carbon steel, arm from premium chrome vanadium steel
- drop forged, entirely hardened and tempered
- surface finish: trivalent chrome plated according to ISO 1456:2009, screw blackened
- lever action claws fit closely under the part to be removed

Voordelen:

- by reversing the arms, the puller can be used as internal or external puller

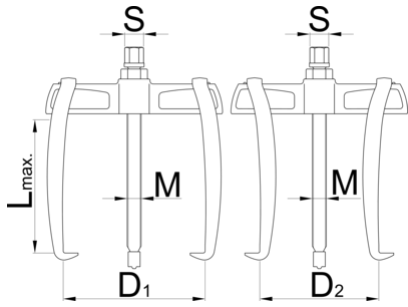

	Nº	L↑	D1	D2	F_{max} →	t_{max} →	M	S	
615076	60	90	65	50 - 90	25	2.5	M 10x1	13	325
615077	90	90	90	50 - 110	25	2.5	M 10x1	13	395
615078	130	140	130	80 - 140	50	5	M 14x1,5	17	1125
615079	180	140	180	80 - 180	50	5	M 14x1,5	17	1225
615080	250	195	250	130 - 250	75	7.5	M 22x2	24	4025
615081	350	195	350	130 - 350	75	7.5	M 22x2	24	4525

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Gebruik (Afbeeldingen)



Onderdelen

Arm

Spindle

Gerelateerde producten



Trekker, 2-armig












Trekker, 2-armig



Trekker, 3-armig

Veiligheid (Afbeeldingen)

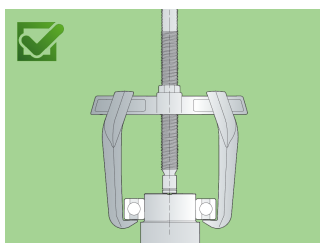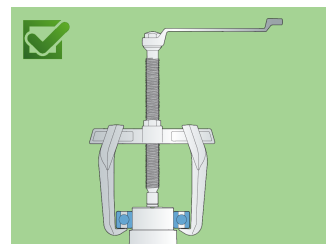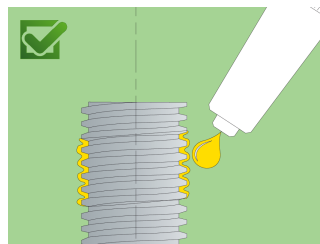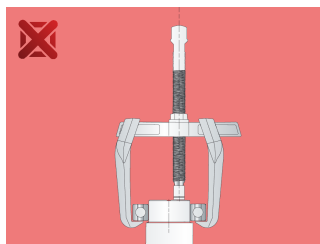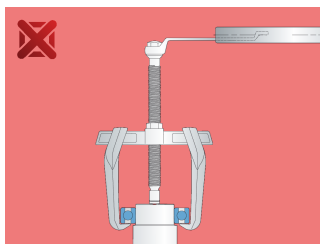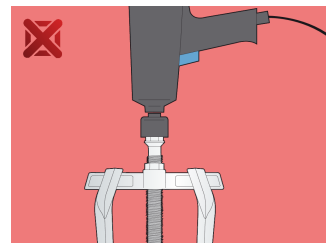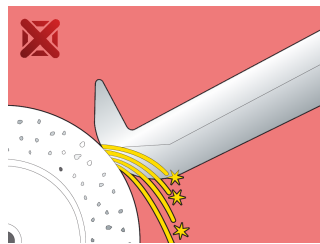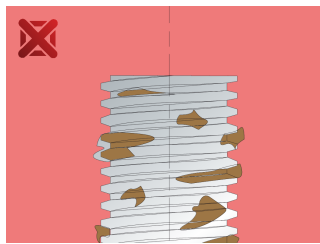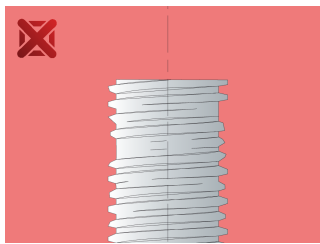

Veelgestelde vragen

Can we achieve greater pulling force using a three-arm puller compared to a two-arm puller?
It depends on the dimensions. In principle, yes, because the force is distributed over several arms.

One arm broke. Do I have to replace all the arms or just the broken one?

It is necessary to change all the arms.