

Bottom bracket wrench 16 notch

1609/2BI



Usage




Product attributes

- material: premium flex plus carbon steel
- surface finish: chrome plated according to ISO 1456:2009
- ergonomic heavy duty double component handle


How to use the tool:

- The wrench is used to remove and install Shimano® Hollowtech II, Campagnolo® Ultra-Torque and Power Torque, Race Face®, FSA®, SRAM®, Truvativ®, Chris King® bottom brackets as well as many and others. Small wrench is included for removal and installation of Shimano plastic bolts that are used on the Hollowtech II cranksets. The 1609/2BI wrench also fits on the external centerlock disc nut.

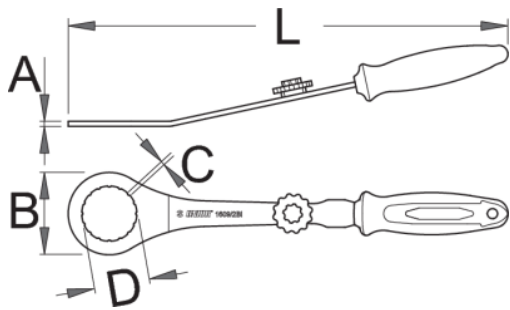

Barcode	L	A	B	D	C	Icon
---------	---	---	---	---	---	------


615536	350	4	66	42,7	2,8	316
--------	-----	---	----	------	-----	-----

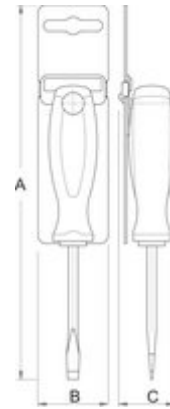

Retail packaging

Barcode	MB	MC	MA	Icon
---------	----	----	----	------

615536	66	40	455	345
--------	----	----	-----	-----

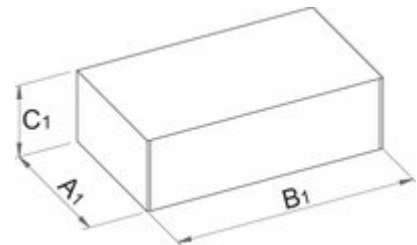

Transport packaging

Barcode	Hand icon	TB	TC	TA	Icon
---------	-----------	----	----	----	------

615536	4	377	65	109	1480
--------	---	-----	----	-----	------

Spare parts



Crank cap tool metal