

Bottom bracket wrench 16 notch

1609/2BI



Usage



Profiles




[./\(eng/support/warranty\).](https://uniortools.com/en/support/warranty)

Product features

- material: premium flex plus carbon steel
- surface finish: chrome plated according to ISO 1456:2009
- ergonomic heavy duty double component handle

How to use the tool:

- The wrench is used to remove and install Shimano® Hollowtech II, Campagnolo® Ultra-Torque and Power Torque, Race Face®, FSA®, SRAM®, Truvativ®, Chris King® bottom brackets as well as many and others. Small wrench is included for removal and installation of Shimano plastic bolts that are used on the Hollowtech II cranksets. The 1609/2BI wrench also fits on the external centerlock disc nut.

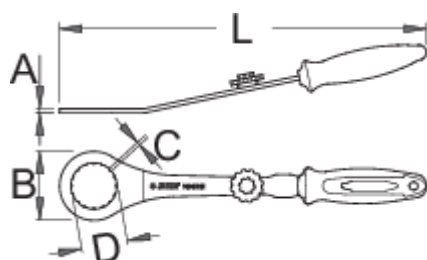



L

A

B

D

C



615536

350


4

66

42,7

2,8

316

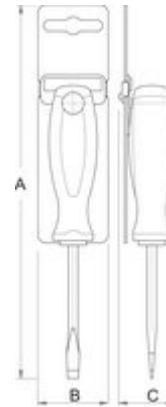

Retail packaging



MB

MC

MA




615536

66

40

455

345

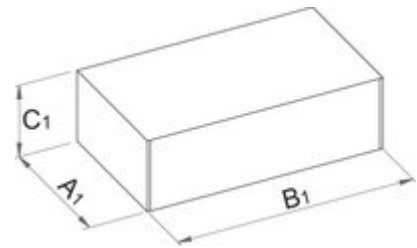

Transport packaging



TB

TC

TA



615536

4

377

65

109

1480

Spare parts



Crank cap tool metal