

# Pneumatic reversible ratchet

1531



## Profiles



## Product features

- free speed 250 revolution per minutes
- max. torque 54 Nm
- maximum air pressure: 6,2 Bar
- air consumption 71 l/min
- air inlet 1/4"
- max bolt size M6

## Advantages:

- small and compact tool
- quality production
- handy turn-on switch
- fast and handy adjustment of the rotation direction
- sluice-gate enabling prevention of air inlet into the tool


## Usage:

- car industry
- aircraft industry

- agricultural equipment
- heavy industry
- larger construction machinery
- shipbuilding industry
- individual mounting

### Important!

- The use of Unior IMPACT sockets is recommended.

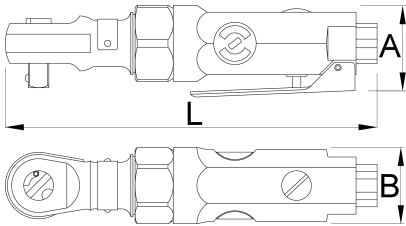

		<b>L</b>	<b>A</b>	<b>B</b>		
615318	3/8"	165	37	41	54	520

\* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

### Usage (pictures)



### Photo (pictures)



### Accessories



Coupling, male part



Coupling, male part



Coupling, female part



Coupling, female part



Pneumatic filter regulator and lubricator 1/4"



Pneumatic filter regulator and lubricator 3/8"



Pneumatic filter regulator and lubricator 1/2"



Spiral pneumatic hose

## Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.



- Always disconnect tools not in use from the air supply.

- Repairs can be performed only by authorised staff people authorised by Unior d.d.