Račna pneumatska 3/8"

1531



Profili



Atributi proizvoda

- 250 o/min u slobodnom hodu
- max. okretni moment 27 Nm
- max. pritisak zraka: 6, 2 bara
- potrošnja zraka: 71 l/min
- priključak za zrak: 1/4"
- za vijke do M6

Prednosti:

- lagan i kompaktan alat
- kvalitetna izrada
- praktično pozicioniran prekidač
- brzo i praktično podešavanje smjera rotacije
- specijalna konstrukcija sa zaštitnom pregradom omogućuje prekid dovoda zraka u alat


Upotreba:

- automobilska industrija
- avionska industrija

- poljoprivredna mehanizacija
- teška industrija
- veći građevinski strojevi
- brodogradnja
- individualna montaža

Važno!

- preporuča se upotreba Uniorovih IMPACT nasadnih ključeva

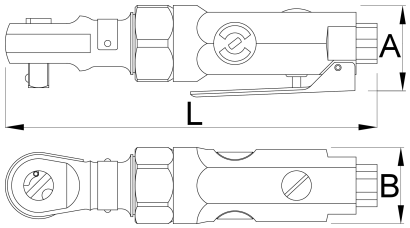

		L	A	B	Nm	
615318	3/8"	175	37	36	54	520

* Slike proizvoda su simbolične. Sve dimenzije su u mm, masa je u g.

Upotreba (pictures)



Photo (pictures)



Accessories

 Spojnica muška

 Spojnica muška

 Spojnica ženska

 Spojnica ženska

 Pripremna grupa 1/4"

 Pripremna grupa 3/8"

 Pripremna grupa 1/2"

 Crijevo spiralno za zrak

Safety tips

- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.

- Always disconnect tools not in use from the air supply.