

3/8"气动棘轮扳手

1531



配置文件



产品属性

- 每分钟250转的空载转速
- 最大扭矩54 Nm
- 最大气压：6.2 Bar
- 空气消耗量71升/分钟
- 1/4"进气口
- 最大螺栓尺寸M6

优势：

- 小型紧凑工具
- 高品质生产
- 易用气动开关
- 旋转方向的快速便捷调整
- 防止空气进入工具的闸门


用途：

- 汽车行业
- 航空业

- 农业设备
- 重工业
- 大型建筑机械
- 造船业
- 单独安装

重要事项！

- 建议使用Unior气动套筒

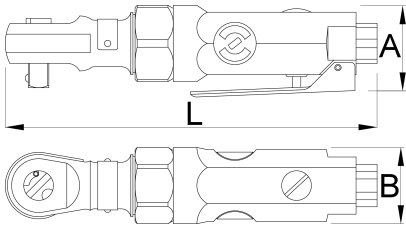

615318	3/8"	165	37	41	54	520

* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.


用途 (pictures)



Photo (pictures)




Accessories




气动管接头



气动管接头



气动管接头



气动管接头



1/4"气动过滤调节器和润滑器



3/8"气动过滤调节器和润滑器



1/2"气动过滤调节器和润滑器



螺旋气动软管

Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.



- Always disconnect tools not in use from the air supply.

- Repairs can be performed only by authorised staff people authorised by Unior d.d.