

3/8"气动棘轮扳手

1531



配置文件



产品属性

- 每分钟250转的空载转速
- 最大扭矩54 Nm
- 最大气压：6.2 Bar
- 空气消耗量71升/分钟
- 1/4"进气口
- 最大螺栓尺寸M6

优势：

- 小型紧凑工具
- 高品质生产
- 易用气动开关
- 旋转方向的快速便捷调整
- 防止空气进入工具的闸门


用途：

- 汽车行业
- 航空业

- 农业设备
- 重工业
- 大型建筑机械
- 造船业
- 单独安装

重要事项！

- 建议使用Unior气动套筒

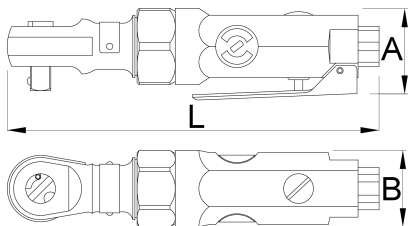

| | | | | | | |
|--------|------|-----|----|----|----|-----|
| | | | | | | |
| 615318 | 3/8" | 165 | 37 | 41 | 54 | 520 |

* Images of products are symbolic. All dimensions are in mm, and weight in grams. All listed dimensions may vary in tolerance.

用途 (pictures)



Photo (pictures)




Accessories




气动管接头



气动管接头



气动管接头



气动管接头



1/4"气动过滤调节器和润滑器



3/8"气动过滤调节器和润滑器



1/2"气动过滤调节器和润滑器



螺旋气动软管

Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.



- Always disconnect tools not in use from the air supply.

- Repairs can be performed only by authorised staff people authorised by Unior d.d.