Pneumatische slag-ratelschroevendraaier 3/8"

1531



Profielen



Product attributen

- free speed 250 revolution per minutes
- max. torque 54 Nm
- maximum air pressure: 6,2 Bar
- air consumption 71 l/min
- air inlet 1/4"
- max bolt size M6

Voordelen:


- small and compact tool
- quality production
- handy turn-on switch
- fast and handy adjustment of the rotation direction
- sluice-gate enabling prevention of air inlet into the tool

Gebruik:

- car industry
- aircraft industry
- agricultural equipment
- heavy industry
- larger construction machinery
- shipbuilding industry
- individual mounting

Important!

- The use of Unior IMPACT sockets is recommended.

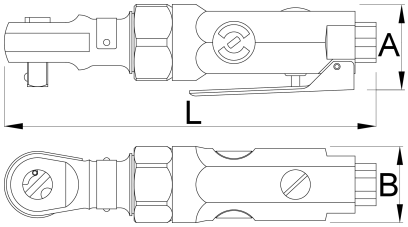

		L	A	B	Nm	
615318	3/8"	175	37	36	54	520

* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

Gebruik (Afbeeldingen)



Foto (Afbeeldingen)



Accessoires

 Koppeling, man

 Koppeling, man

 Koppeling, vrouw

 Koppeling, vrouw

 Pneumatische filterdrukregelaar en olievernevelaar 1/4"

 Pneumatische filterdrukregelaar en olievernevelaar 3/8"

 Pneumatische filterdrukregelaar en olievernevelaar 1/2"

 Spiraalslang

Veiligheidstips

- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.

- Always disconnect tools not in use from the air supply.

- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.