

# Pneumatische slag- ratelschroevendraaier 3/8"

1531



## Profielen



## Product attributen

- free speed 250 revolution per minutes
- max. torque 54 Nm
- maximum air pressure: 6,2 Bar
- air consumption 71 l/min
- air inlet 1/4"
- max bolt size M6

## Voordelen:


- small and compact tool
- quality production
- handy turn-on switch
- fast and handy adjustment of the rotation direction
- sluice-gate enabling prevention of air inlet into the tool

## Gebruik:

- car industry
- aircraft industry
- agricultural equipment
- heavy industry
- larger construction machinery
- shipbuilding industry
- individual mounting

### Important!

- The use of Unior IMPACT sockets is recommended.

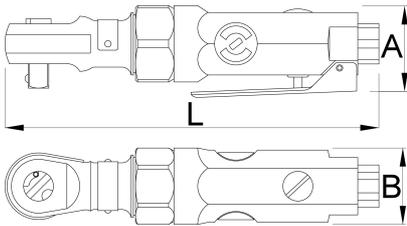

						
615318	3/8"	165	37	41	54	520

\* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.

### Gebruik (Afbeeldingen)



### Foto (Afbeeldingen)



### Accessoires



Koppeling, man



Koppeling, man



Koppeling, vrouw



Koppeling, vrouw



Pneumatische filterdrukregelaar en olieverniveelaar 1/4"



Pneumatische filterdrukregelaar en olieverniveelaar 3/8"



Pneumatische filterdrukregelaar en olieverniveelaar 1/2"



Spiraalslang

## Veiligheidstips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.



- Always disconnect tools not in use from the air supply.

- Repairs can be performed only by authorised staff people authorised by Unior d.d.