

Pneumatic reversible ratchet

1551



Profiles



Product features

- free speed 160 revolution per minutes
- max. torque 81 Nm
- maximum air pressure: 6,2 Bar
- air consumption 113 l/min
- air inlet 1/4"
- max bolt size M10

Advantages:

- small and compact tool
- quality production
- handy turn-on switch
- fast and handy adjustment of the rotation direction
- sludge-gate enabling prevention of air inlet into the tool


Usage:

- car industry
- aircraft industry
- agricultural equipment

- heavy industry
- larger construction machinery
- shipbuilding industry
- individual mounting

Important!

- The use of Unior IMPACT sockets is recommended.

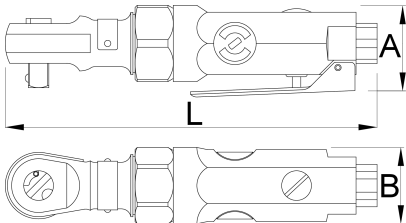

		L	A	B		
615319	1/2"	254	45	41	81	1370

* Images of products are symbolic. All dimensions are in mm, and weight is in grams. All listed dimensions may vary in tolerance.

Photo (pictures)



Accessories



Coupling, male part



Coupling, male part



Coupling, female part



Coupling, female part



Pneumatic filter regulator and lubricator 3/8"



Pneumatic filter regulator and lubricator 1/2"



Spiral pneumatic hose

Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.



- Always disconnect tools not in use from the air supply.