

Antrenor reversibil pneumatic 1/2"

1551



Profile



Caracteristicile produsului

- viteza de rotatie 160 rot/min
- Moment de torsiune max. 81 Nm
- Presiunea maxima de aer comprimat: 6, 2 Bar
- Consum de aer comprimat 113 l/min
- Racord de aer 1/4"
- Diametrul maxim de strangere M10

Avantaje:

- scula mica si compacta
- calitatea productiei
- maner rotitor
- reglare rapida si usoara a sensului de rotatie
- supapa de protectie previne intrarea necontrolata a aerului in scula


Utilizare

- industria auto
- industria aerospatiala
- echipament agricol

- industria grea
- constructia de masini
- industria de constructii navale
- montari individuale

Important

- Folosirea capetelor de impact UNIOR este recomandata

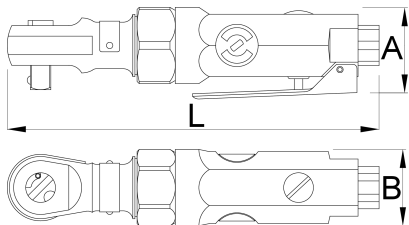

		L	A	B		
615319	1/2"	254	45	41	81	1370

* Imaginea produsului este simbolica. Toate dimensiunile sunt exprimate în mm, greutatea în grame.

Photo (pictures)



Accessories



Cuplaj, partea tata



Cuplaj, partea tata



Cuplaj, partea mama



Cuplaj, partea mama



Filtru regulator si ungator pneumatic 3/8"



Filtru regulator si ungator pneumatic 1/2"



Furtun pneumatic elicoidal

Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.
- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.



- Always disconnect tools not in use from the air supply.