

Čegrtaljka pneumatska 1/2"

1551



Profilii



Opis proizvoda

- 160 o/min u slobodnom hodu
- max. obrtni moment 81 Nm
- max. pritisak vazduha: 6, 2 bara
- potrošnja vazduha: 113 l/min
- priključak za vazduh: 1/4"
- za vijke do M10

Prednosti:

- mali i kompaktni alat
- kvalitetna izrada
- pogodno pozicioniran prekidač
- brzo i zgodno podešavanje smera rotacije
- specijalna konstrukcija sa zaštitnom pregradom omogućava prekid dotoka vazduha u alat


Upotreba:

- auto-industrija
- avio-industrija
- poljoprivredna mehanizacija

- teška industrija
- veće građevinske mašine
- brodogradnja
- individualna montaža

VAŽNO!

- preporučuje se upotreba Uniorovih IMPACT nasadnih ključeva

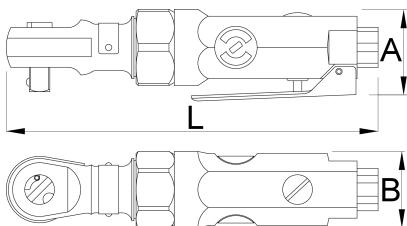

		L	A	B		
--	--	---	---	---	--	--

615319

1/2"

254

45

41

81

1370

* Fotografije proizvoda su simbolične. Sve dimenzije su u mm, a težina u gramima. Sve navedene dimenzije mogu odstupati u granicama tolerancija.

Slika (slike)



Dodatna oprema



Spojnica muška



Spojnica muška



Spojnica ženska



Spojnica ženska



Pripremna grupa za pneumatski alat 3/8"



Pripremna grupa za pneumatski alat 1/2"



Crevo spiralno za vazduh

Pravilna upotreba



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
 - Regularly clean and dry the air filters and inlet air supply.
 - Always use clean and dry air with the correct mixture of oil, for maximum tool life.
 - Check the joints and ensure that the tubes and other equipment are not damaged before use.
 - All tools should be gently oiled prior to being stored.
 - Always store pneumatic tools in dry places away from water.
 - Always use original spare parts.
 - Repairs can be performed only by authorised staff people authorised by Unior d.d.
- Always disconnect tools not in use from the air supply.