

# Pnömatik değişken uçlu çekiç 1"

1591



## Profiles



## Product features

- serbest hız dakikadaki devir sayısı 4000
- maks. tork 2439 Nm
- maksimum hava basıncı: 6,2 Bar
- hava tüketimi 340 l/dk
- hava girişi 1/2"
- maks. civata boyutu M36

## Avantajları:

- kontrollü tork
- hızlı vidalama
- geniş çeşitlilikte kullanım


## Kullanım:

- araba sanayi
- uçak sanayi
- tarım ekipmanı

- ağır sanayi
- büyük inşaat makineleri
- gemi inşaat sanayisi
- bireysel montaj

## Önemli!

- Her zaman Unior DARBELİ lokmalarını kullanın.

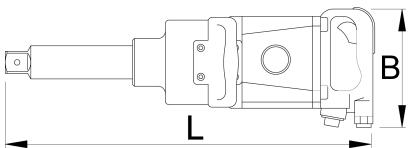


		B	L		
615325	1"	650	495	2439	13000

\* Ürünlerin resimleri semboliktir. Bütün boyutlar mm ve ağırlık gram cinsindendir.

## Accessories



Bağlantı elemanı, erkek parça



Bağlantı elemanı, dişi parça



Pnömatik filtre düzenleme ve yağlama aleti 3/4"



Spiral pnömatik hortum

## Safety tips



- The pressure in the tool during the operation has to be at least 6.2 bar for the tool to work properly.
- Regularly clean and dry the air filters and inlet air supply.
- Always use clean and dry air with the correct mixture of oil, for maximum tool life.



- Always disconnect tools not in use from the air supply.

- Check the joints and ensure that the tubes and other equipment are not damaged before use.
- All tools should be gently oiled prior to being stored.
- Always store pneumatic tools in dry places away from water.
- Always use original spare parts.
- Repairs can be performed only by authorised staff people authorised by Unior d.d.