

# Slagschroevendraaierset

6762



## Profielen










## Product attributen

- Dimension of box: 197 x 105 x 38


## Set bevat

- 1x Impact screwdriver (article 6762.1) dim. 1/2"
- 1x Impact adapter (article 6762.2) dim. 1/2"-5/16"
- 2x hex bits (article 6489C8) dim. 5, 6
- 4x TX profile bit (article 6492C8) dim. TX20, TX25, TX30, TX40
- 1x crosstip (PH) bit (article 6484C8) dim. PH4
- 2x crosstip (PH) bit (article 6483C8) dim. PH2, PH3
- 3x slotted bit (article 6480C8) dim. 1.2x6.5x41, 1.6x8.0x41, 2.0x12.0x41


Productnaam	SKU	Artikel	Afmetingen	Hoeveelheid
Slagschroevendraaierset	605061	6762	-	14
Bit sleuf, set 3 stuks		6480C8	1.2 x 6.5x41, 1.6 x 8.0x41, 2.0 x 12.0x41	3
Bit phillips, set 3 stuks		6483C8	PH 2, PH 3	2
Bit phillips, set 3 stuks		6484C8	PH 4	1
Bit inbus, set 3 stuks		6489C8	5, 6	2
Bit TX, set 3 stuks		6492C8	TX 25, TX 30, TX 40, TX 20	4
Slagschroevendraaier		6762.1	1/2"x144	1
Adapter 1/2" - 5/16"		6762.2	1/2" - 5/16"	1

\* Afbeeldingen van producten zijn symbolisch. Alle afmetingen zijn in mm en gewicht in gram. Alle vermelde afmetingen kunnen variëren in tolerantie.


Gebruik (Afbeeldingen)

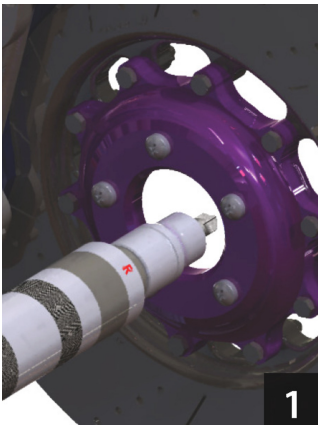


Move impact screwdriver closer to screw, which we will tighten (R), or loosen (L)

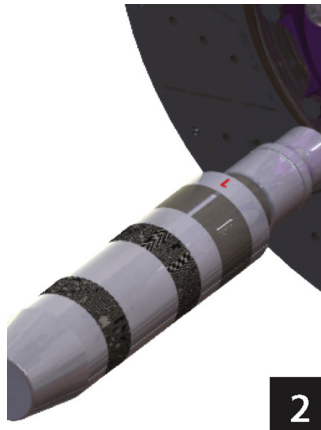


L is showing screw loosening.

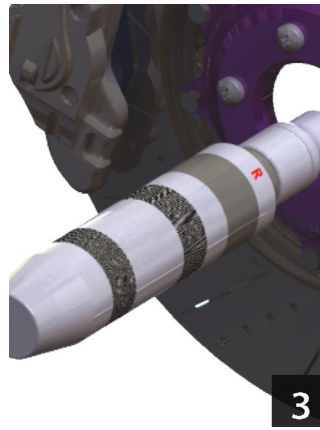


R is showing screw tightening.

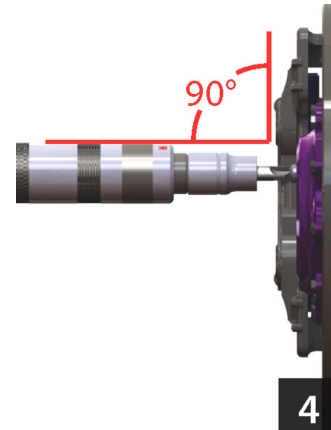

When tightening or loosening the screw, tool has to be placed in a position perpendicular to the screw!

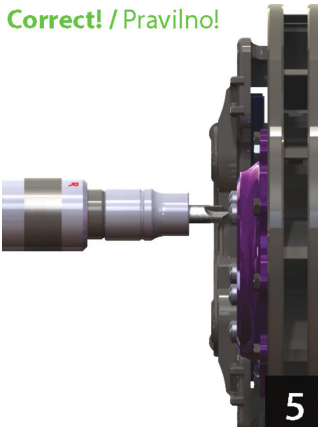

Move tool closer to screw, and don't press it to final position before use. With hammer strike, tool is automatically extracted and tightening/loosening begins.

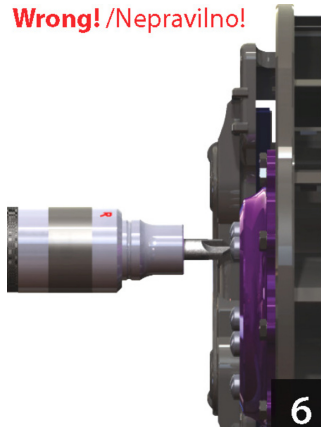

When the tool is in the compressed position, and we strike it with hammer inner mechanism will get destroyed. Never strike tool with hammer, when the tool is in compressed position!



When the tool is properly positioned on the screw, tap the tool holder with hammer. This will trigger mechanism that allows bolt tightening/loosening for approx. 15°.